

Я / $\dot{U}$ /

$$\mathfrak{d} \mid \quad 1 \quad \dagger \quad \underline{u}$$

$$\equiv \quad \kappa \sqcap$$



п ħ ↵



	↵	



0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99


1	2	3
		1 2

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99

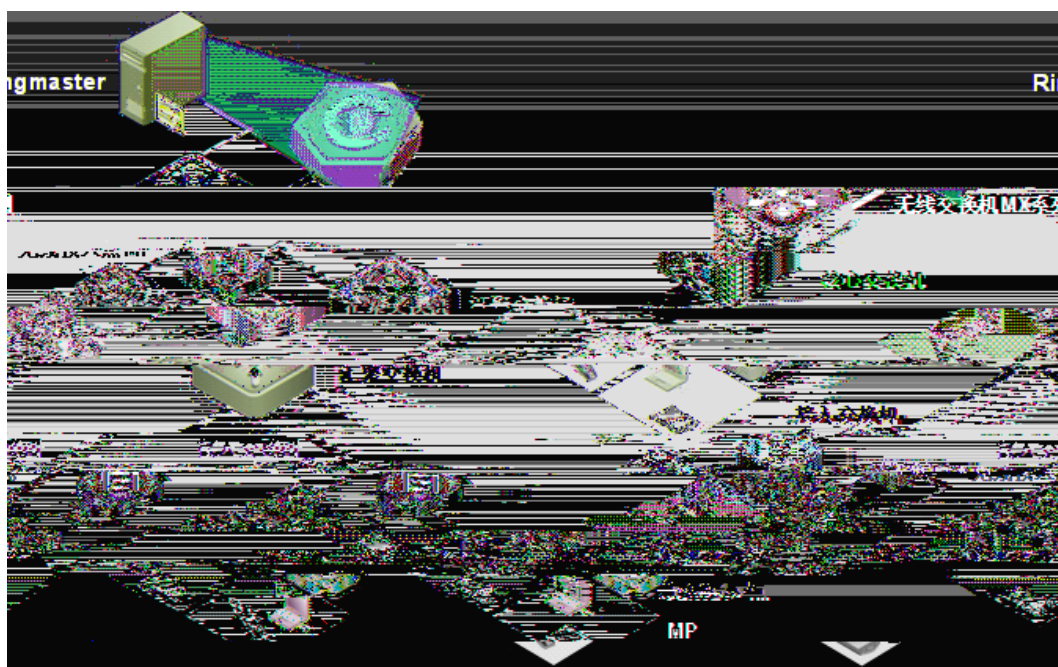



0 1 2 3 4 5 6 7 8 9



1

2


3

4

5


6

7

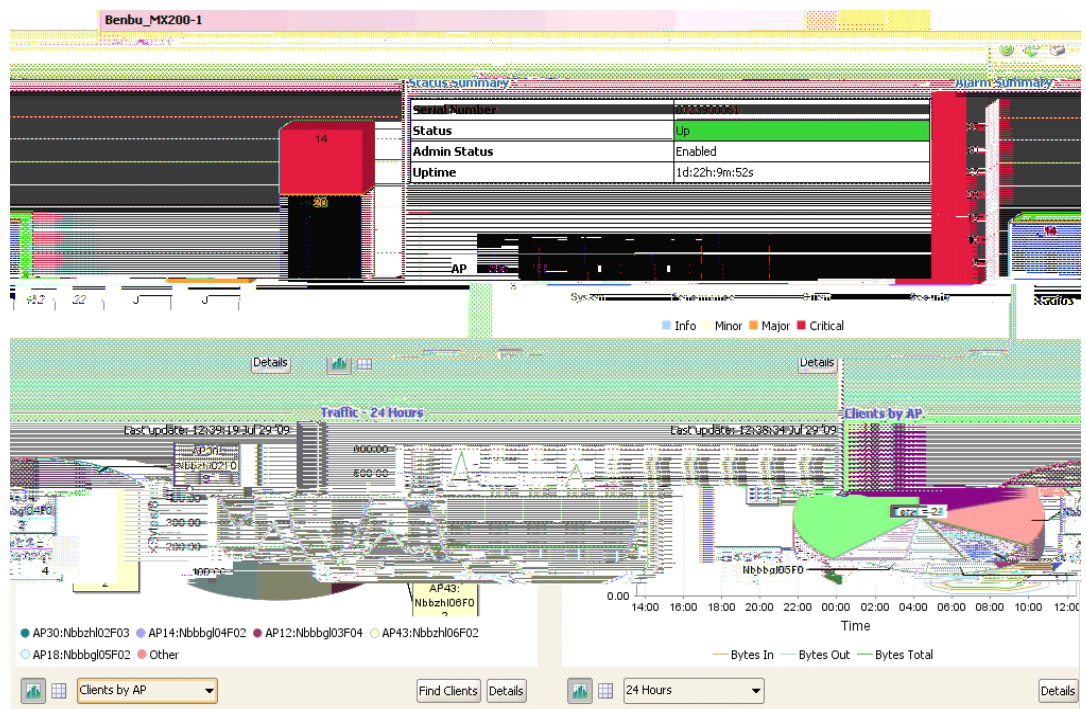

8

敏锐把握应用趋势 • 快捷满足客户需求



1

1

1

1

1

0

1

Benbu_MX200-1

00061

9m:52s

Status Summary

Serial Number	072390
Status	Up
Admin Status	Enable
Uptime	1d:22h

	Up	Down	Disabled	Unknown
AP	206	11	0	0
Radios	412	22	0	0

Details

1

“

”

1



The screenshot shows a network management interface with a table of network devices. The table has columns for device ID, status, name, and various configuration parameters. The status column uses color-coded indicators: green for 'Up' and red for 'Down'. The table lists devices P06, P07, and P08, along with their respective configurations.


Device ID	Status	Name	Configuration 1	Configuration 2	Configuration 3	Configuration 4
P06	Up	Enabled	None	None	None	10/100 Ether...
P06	Down	Enabled	None	None	None	10/100 Ether...
P07	Up	Enabled	100	Full	None	10/100 Ether...
P08	Down	Enabled	None	None	None	10/100 Ether...



Г К ' 6 У ' Š И ф К 6 Ъ џ ' Ω
† Ů Н ' ' ¢ № Н і ь ь ' Ó І Ғ ä ¢




1

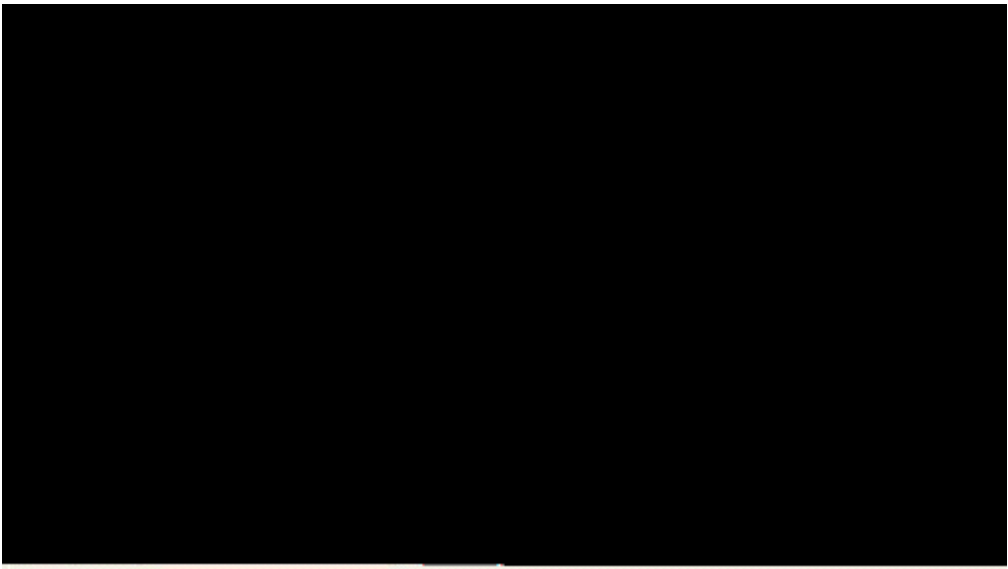

1		2



1

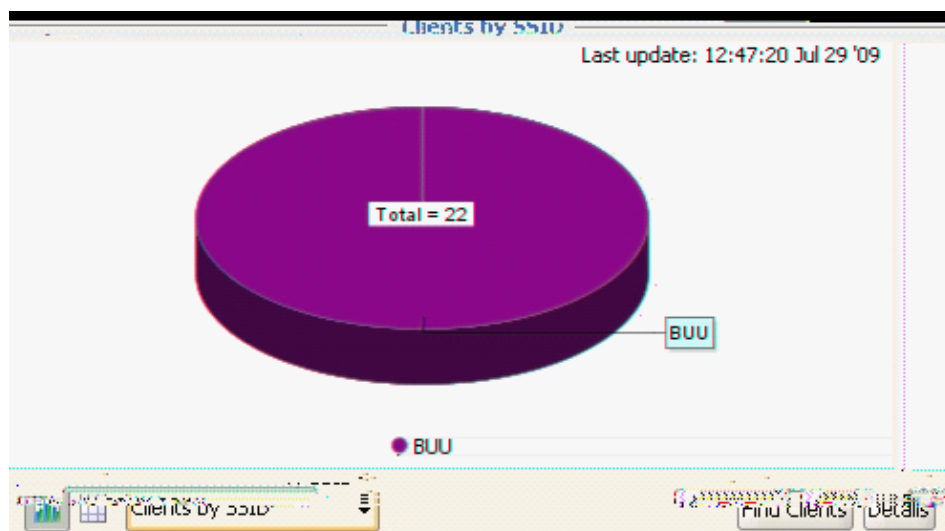


1

2


3

4

1

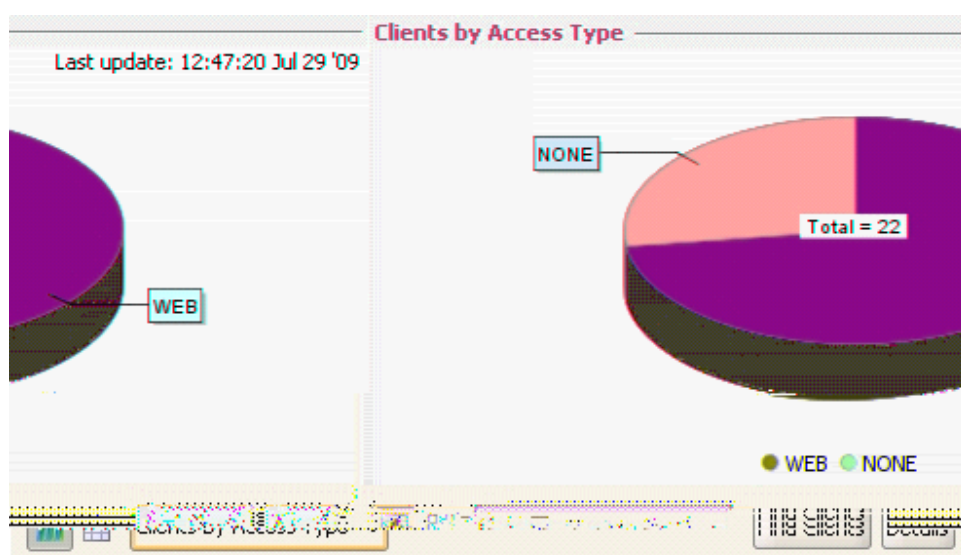

1

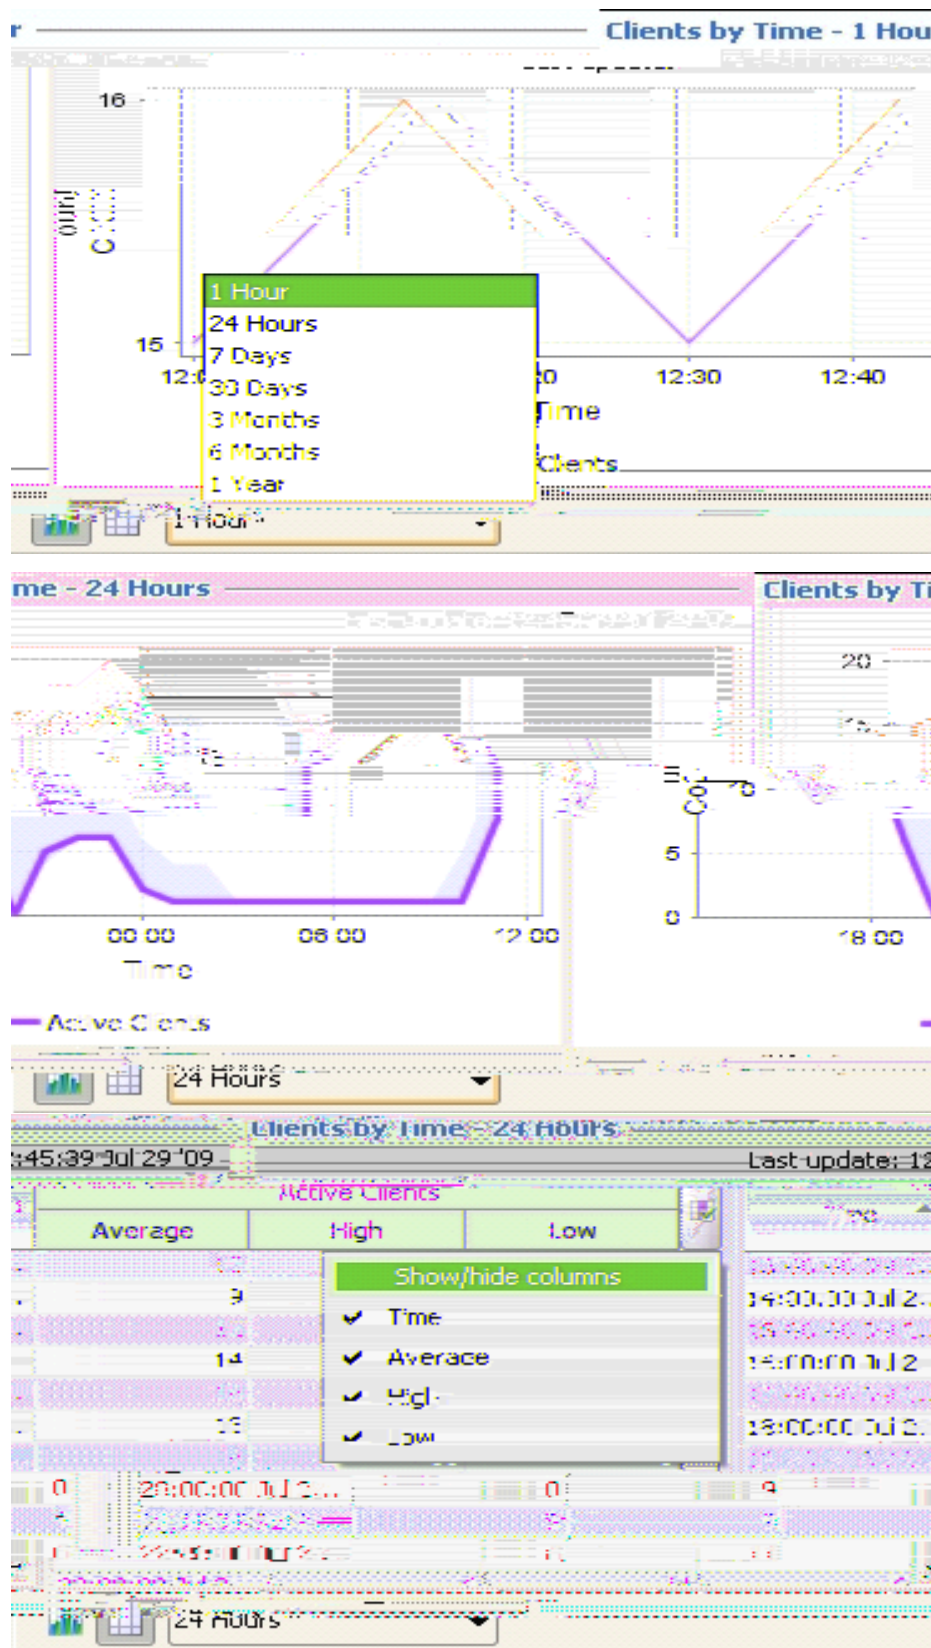

2


3


4

5

6

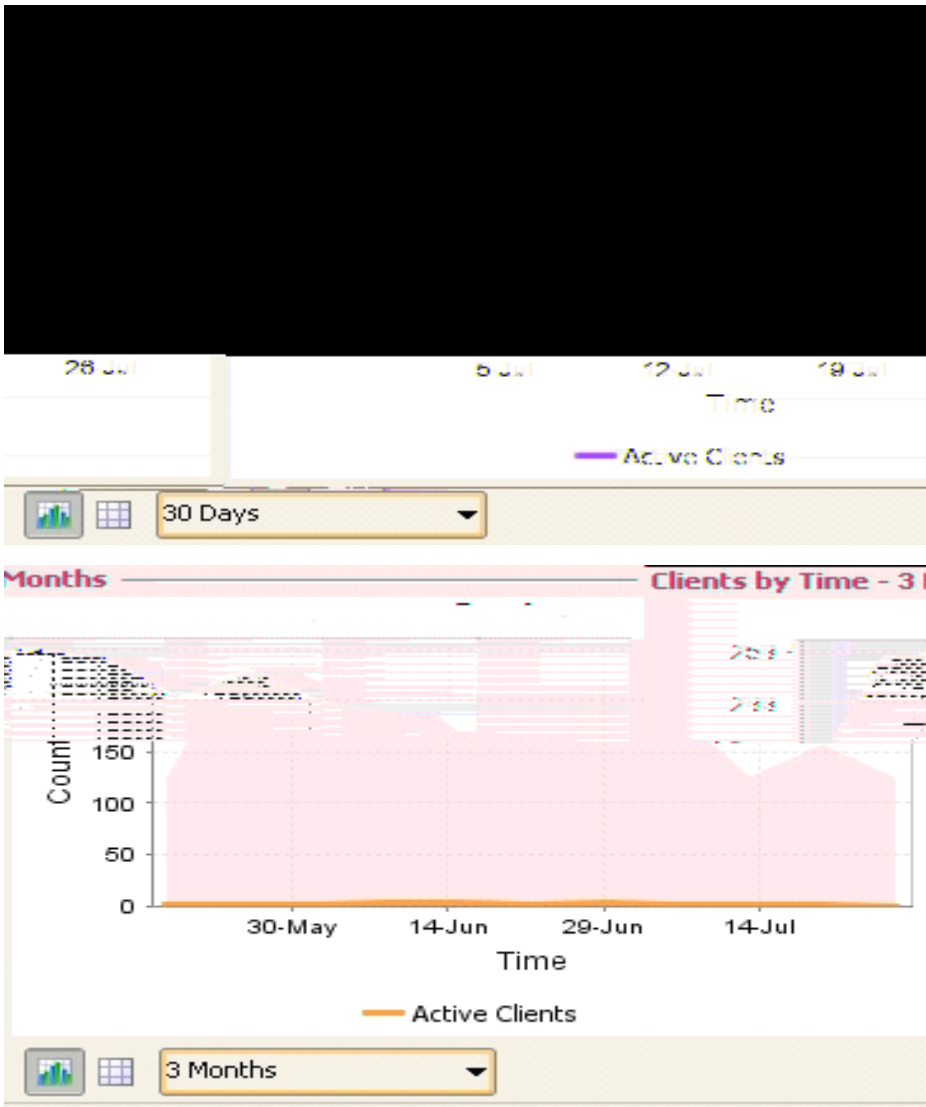

		√ √ 1
--	---	---------------------

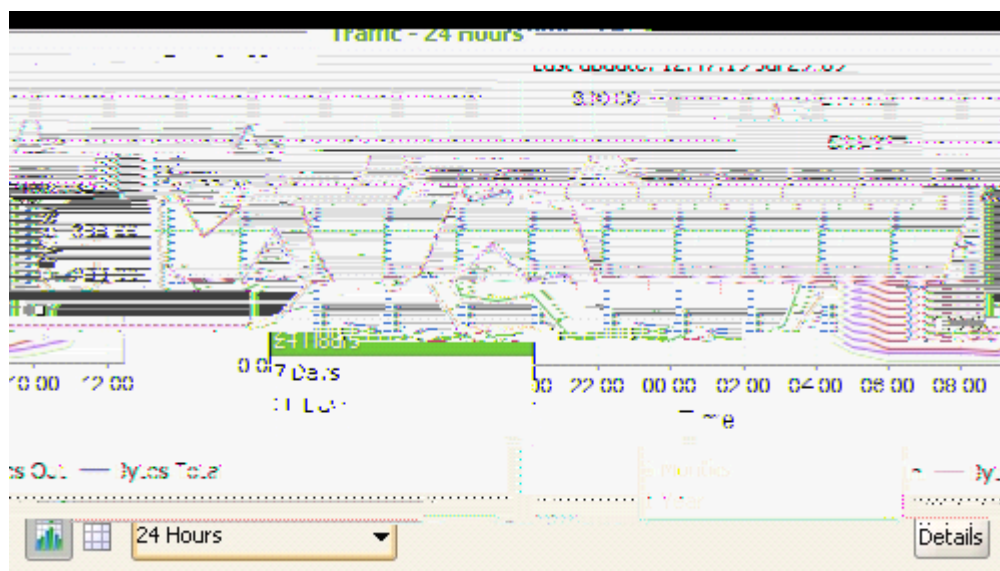



1

2

3

4

5