



RG-IIB-N86K

# 前言

---

。

，

# 目录

---

安全使用说明事项	1
装箱清单	3
接口连接说明	3
面板按键说明	6
OPS电脑安装	7
遥控器	8
基本操作说明	8
产品安装指南	21
软件升级	28
简单问题的处理方法	28
技术规格	29
产品中有毒有害物质或元素的名称及含量	30

14.

1. ---

2. ---

17.

3. ---

4. ---

5. ---

6.

7.

8.

9. 24

10.

11.

12. ( )

-20°C 60°C  
0°C 40°C

13.

31.

32.

33.

34.

35.

( )

36. /

37.

。


1.

2.



## 接口连接说明

---

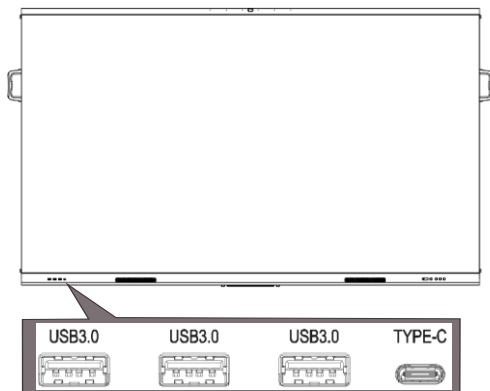

# 接口连接说明


● 1



● 2



● AUDIO-IN



● TOUCH



◆ TOUCH USB

TOUCH USB

● HDMI-I N



◆ HDMI  
EDI D2.0  
HDMI 1

4K@60Hz, 4K@60Hz 时  
5 <1s


EDI D

EDI D


接HDMI1接口。

# 接口连接说明

---

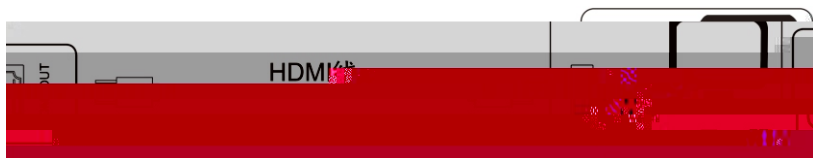

# 面板按键说明

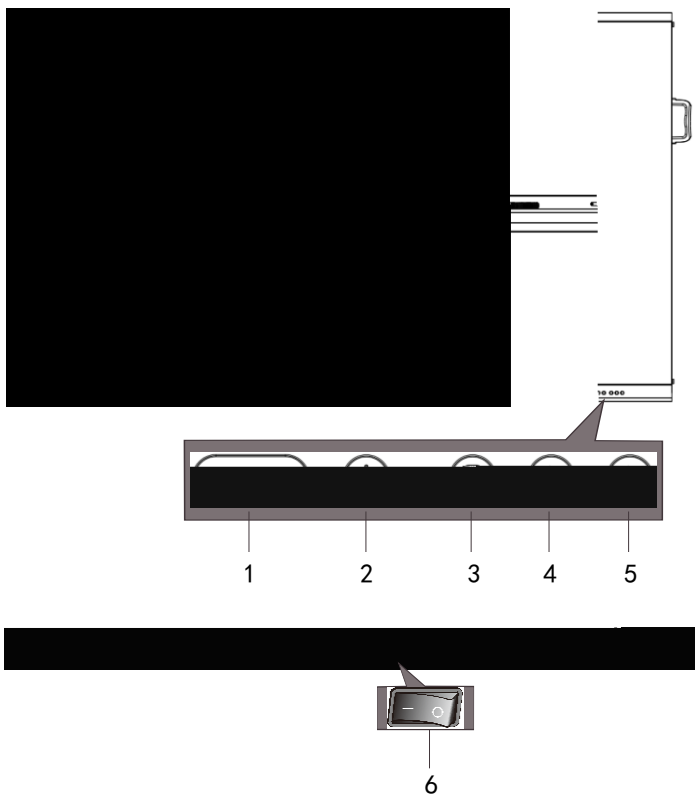


1. : ;
2. : ;
3. : ;
4. : ;
5. : ;
6. 。

窗；

CPS

■ DPS

CPS

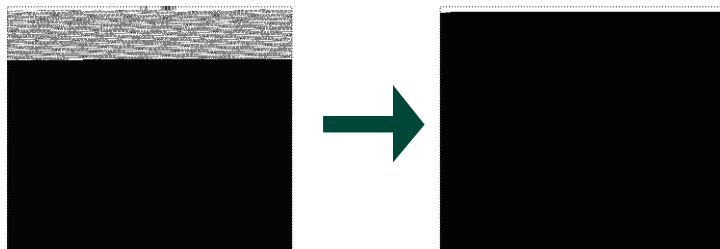

CPS

CPS

CPS


,




CPS

CPS

。


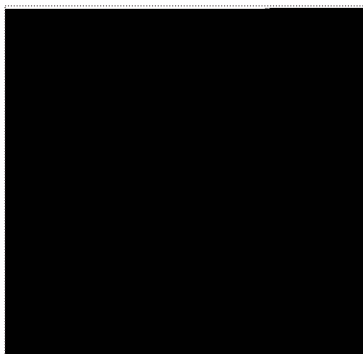




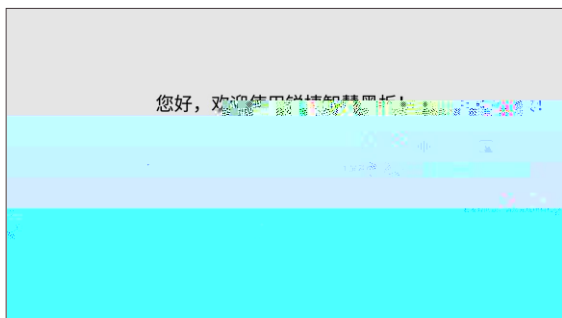

QPS



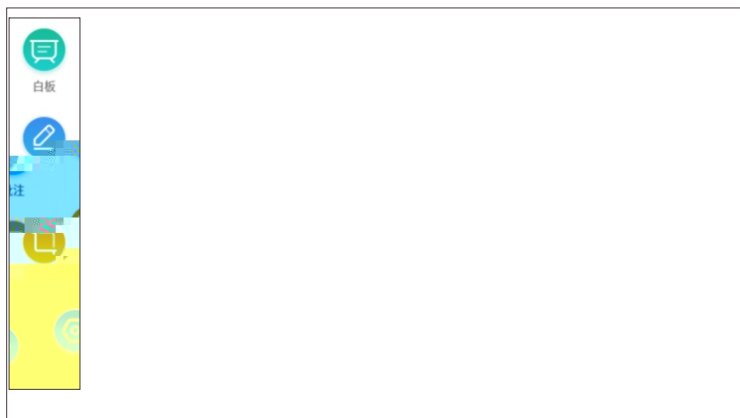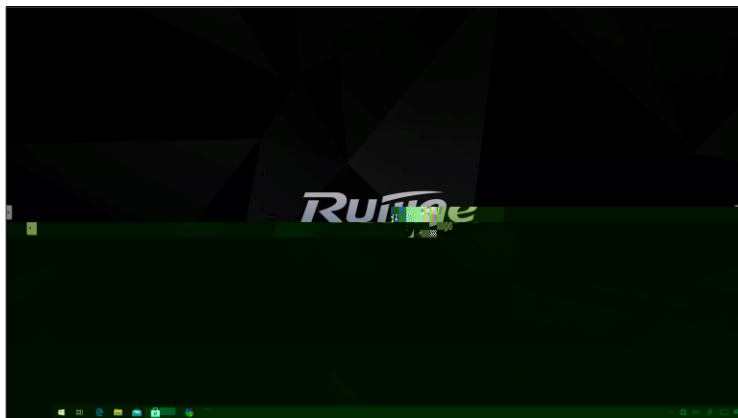

- 1.
- 2.
- 3.
- 4.
- 5.



1.


30%-500

# 基本操作说明

2.



2.

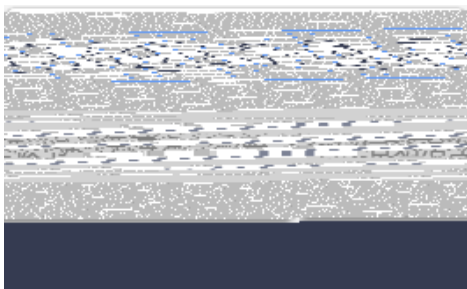

3.




1  
2  
3


4



# 基本操作说明

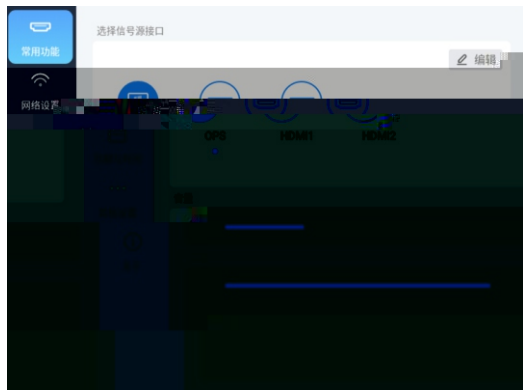

- 1.
  2. OPS
  3. HDM 1
  4. HDM 2
  - 5.
  - 6.
  - 7.
  - 8.
- OPS            HDM 1  
                  HDM 2

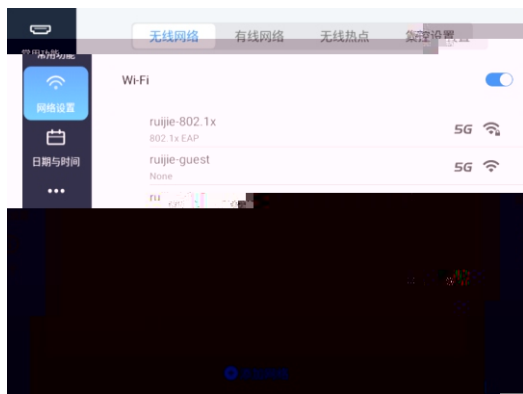

Wi-Fi  
SSID

SSID


SSID


SSID

# 基本操作说明




- 1.
- 2.
3. IP
- 4.
- 5.
6. DNS1
7. DNS2
- 8.
9. IP DHCP IP IP IP  
DNS1 DNS2

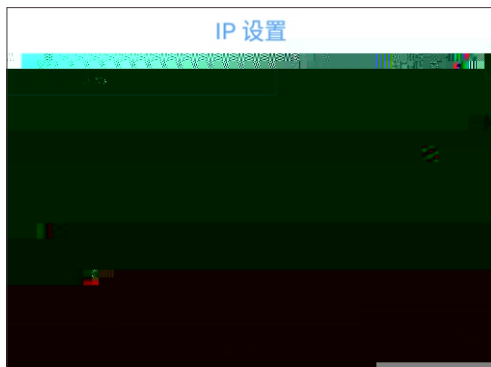

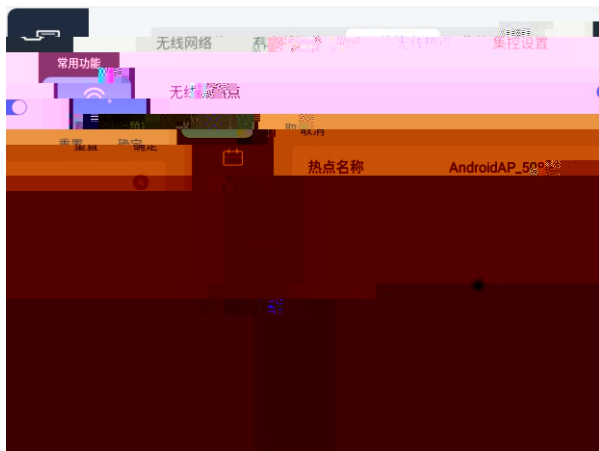


- 1.
- 2.
- 3.
- 4.
- 5.

SSID

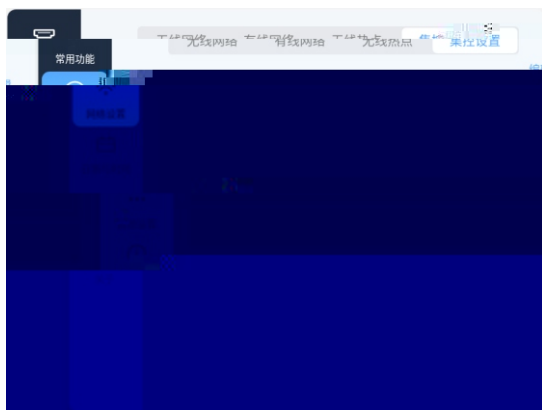


- 1.
- 2.
- 3.
- 4.

# 基本操作说明

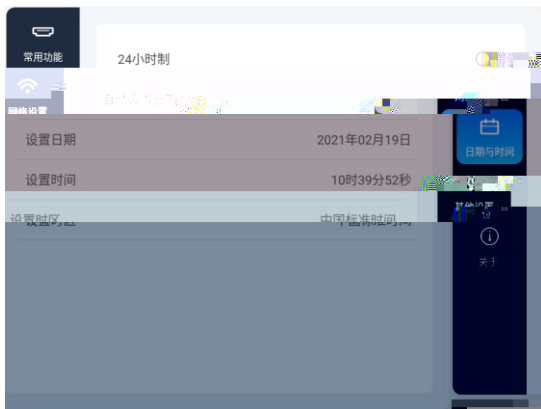

1. 24
- 2.
- 3.
- 4.
- 5.



24

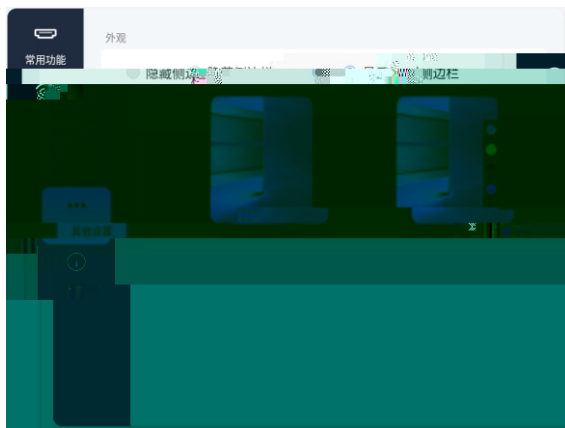




# 基本操作说明

OPS

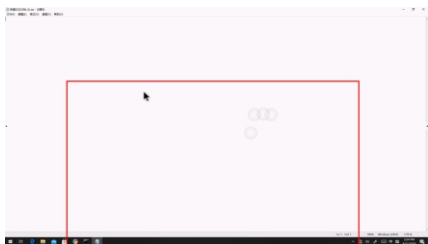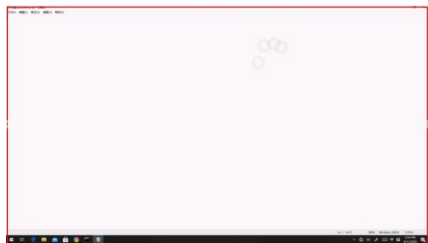



- 
- 
- 
- 
- 
- 
- 

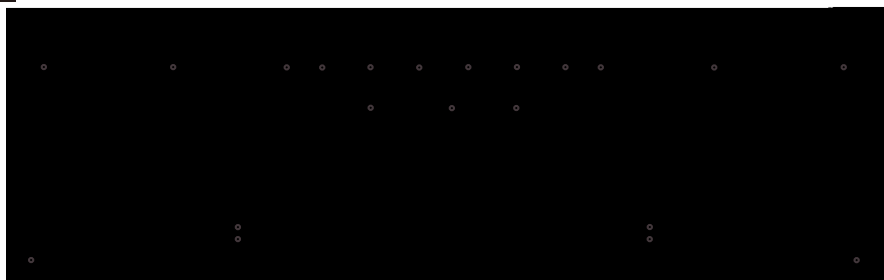


900mm  
1969.2mm


2148.1mm









- 1.
- 2.
- 3.

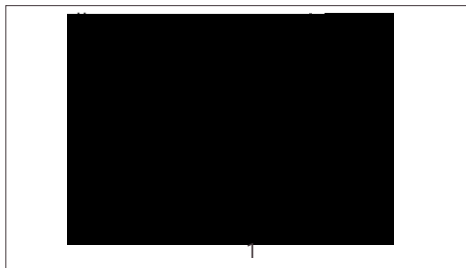


- 1.
- 2.
- 3.
- 4.
- 5.

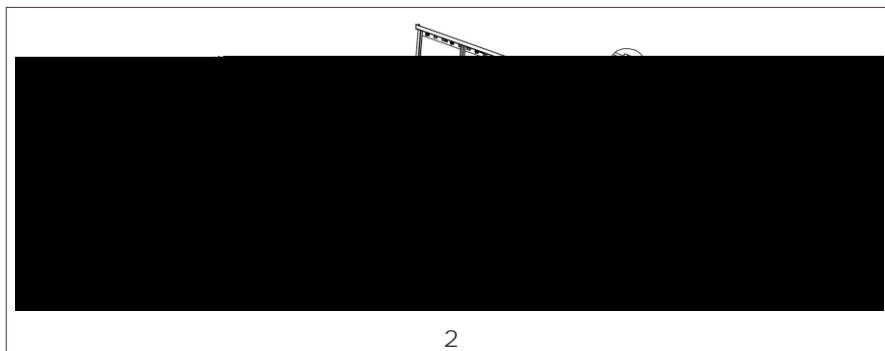


- 1.
- 2.
- 3.
- 4.
- 5.
- 6.

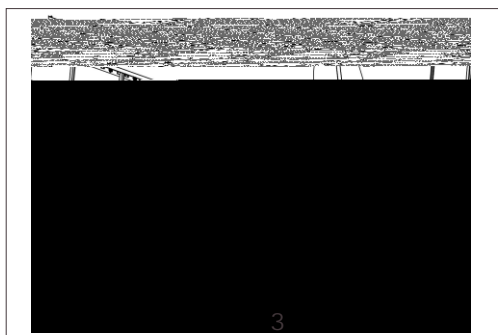

- 1.
- 2.
- 3.
- 4.
- 5.

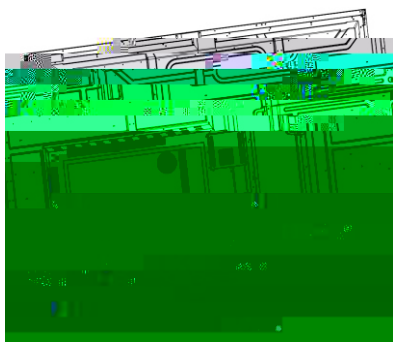

5




1.

2.

3.

4.

2 M4螺丝

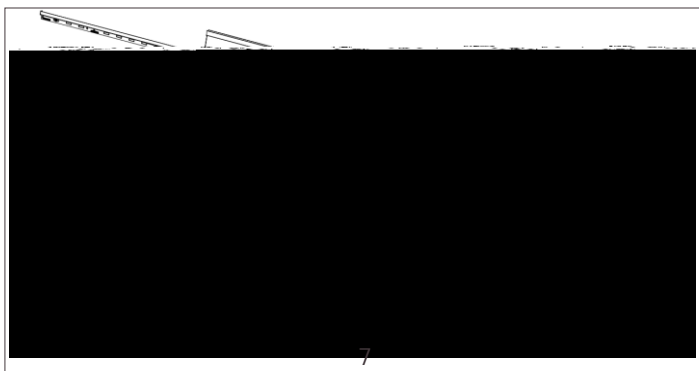



- 1.
2. ;
- 3.



1. 4
- 2.
- 3.


# 技术规格

	RG-IIB-N86K
	AC 220V 50Hz/60Hz ( AC 100-240V 50Hz/60Hz)
	440W
	≤ 0.5W
	1
( × × )	4200mm× 1248.1mm× 112.9mm
× ×	2001mm× 1248.1mm× 112.9mm
× ×	1099.5mm× 1248.1mm× 112.9mm
	73.5kg
	20.8kg
	-20 -60
	10%-90% RH
	0 -40
	10%-90% RH
HDMI	2
LAN	2
AUDIO-IN	1
AUDIO-OUT	1
RS232(DB9)	1
USB 2.0	1
USB 3.0	3
USB TOUCH	1
USB Type-C	1
HDMI OUT	1

- 1.
- 2



