

WEB

I G\$EJK

AP_3.0(1)B2P8

V(%)

)')(\$' \$(

cf gpr^_t ©)') (

cf gpr^_t ©)') (



睿易

x

<https://www.ruijiery.com/>

<https://ocs.ruijie.com.cn/?p=smb>

<https://www.ruijie.com.cn/service.aspx>

7

4001-000-078

<http://bbs.ruijiery.com/>

<https://www.ruijie.com.cn/service/know.aspx>

4001000078@ruijie.com.cn



1.

[]

[]

rospst

[ospst]

&

2.




/

3.

2


2.1

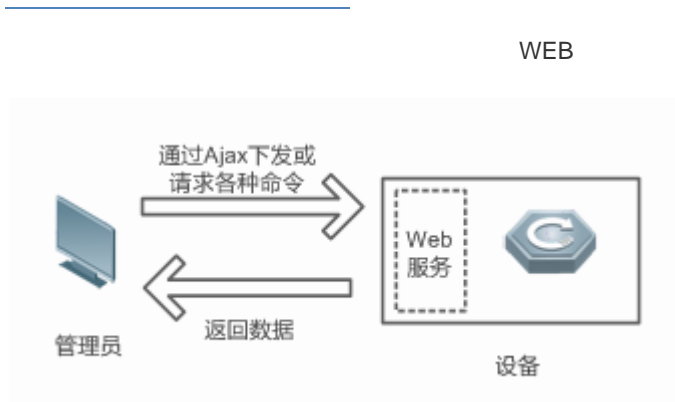

Web
WEB

HTTP

AJAX

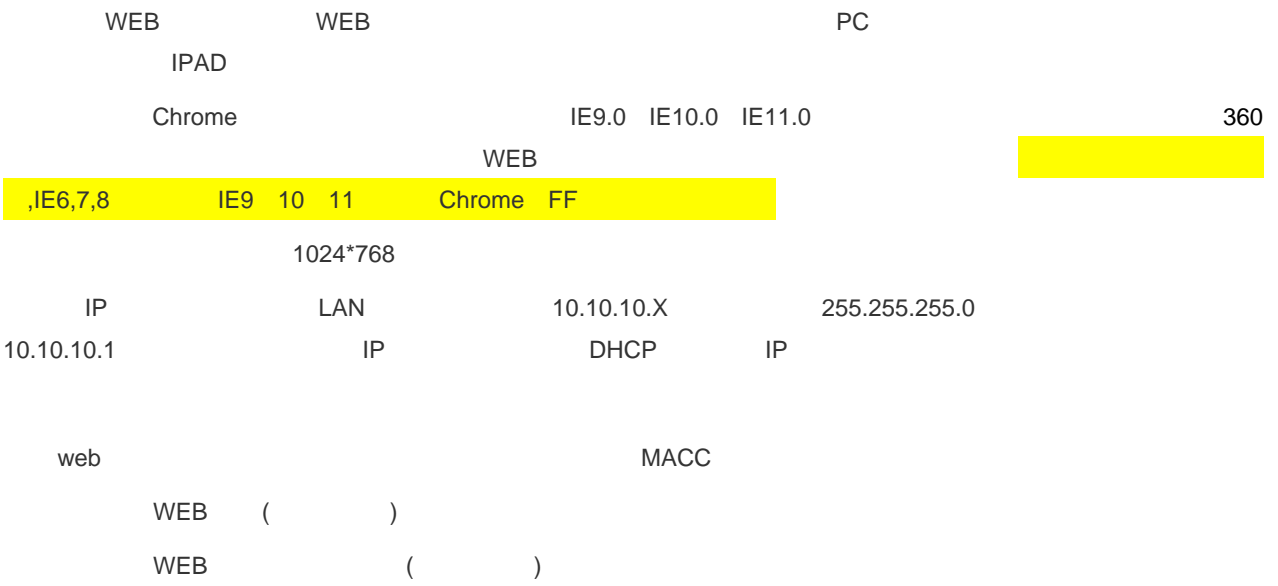

IP (LAN 10.10.10.10)

Chrome
web

10.10.10.10


web

admin



2.2

web

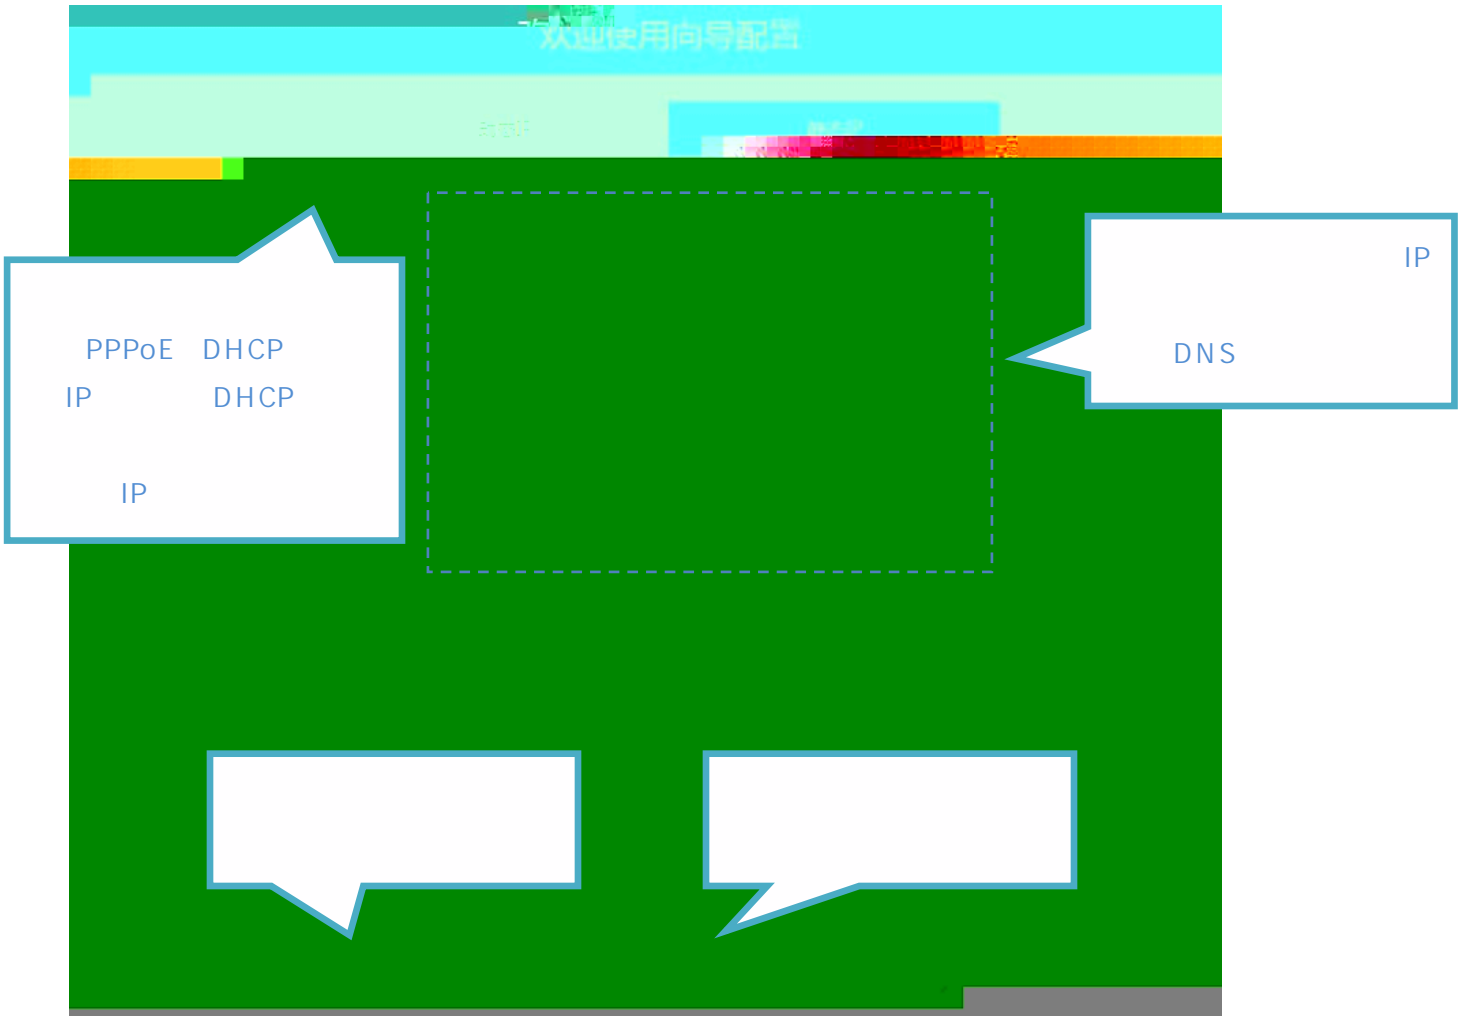

2.3 Web



APP



LAN

* 联网类型 静态IP

* IP地址 10.10.1.10

* 子网掩码 255.255.255.0



3 Eweb

3.1

The screenshot displays the Eweb management interface. At the top, under '设备概况' (Device Overview), there are three summary cards: '内存使用率' (Memory Usage) at 47%, '桥接组总设备数' (Total Bridge Group Device Count) at 2, and system information including '系统运行: 03时21分48秒' (System Running: 03h 21m 48s) and '系统时间: 2021年10月12日 19:26:44' (System Time: 2021-10-12 19:26:44). Below this is a table of devices with columns for '序列号' (Serial Number), '设备名称' (Device Name), '关联时间' (Association Time), 'RSSI', '速率(Mbps)' (Rate), '频段' (Band), '信道' (Channel), '状态' (Status), '角色' (Role), 'MAC', and 'IP'. A table row shows a device with '设备名称' 'Ruijie', '关联时间' '2021-10-12 16:...', '速率' '5', '信道' '24', '状态' '正常', '角色' 'AP', 'MAC' '...', and 'IP' '10.10.1...'. To the right, '桥接组信息' (Bridge Group Information) shows '锁状态: 已锁定' (Lock Status: Locked) and '设备模式: CPE' (Device Mode: CPE). At the bottom, '接口信息' (Interface Information) shows 'LAN1' and 'LAN2' with IP '10.10.10.11'. Three blue callout boxes are overlaid on the interface: one on the top left, one in the middle containing the text 'AP CPE', and one on the bottom left.


3.2

3.2.1 LAN

LAN

IP


IP

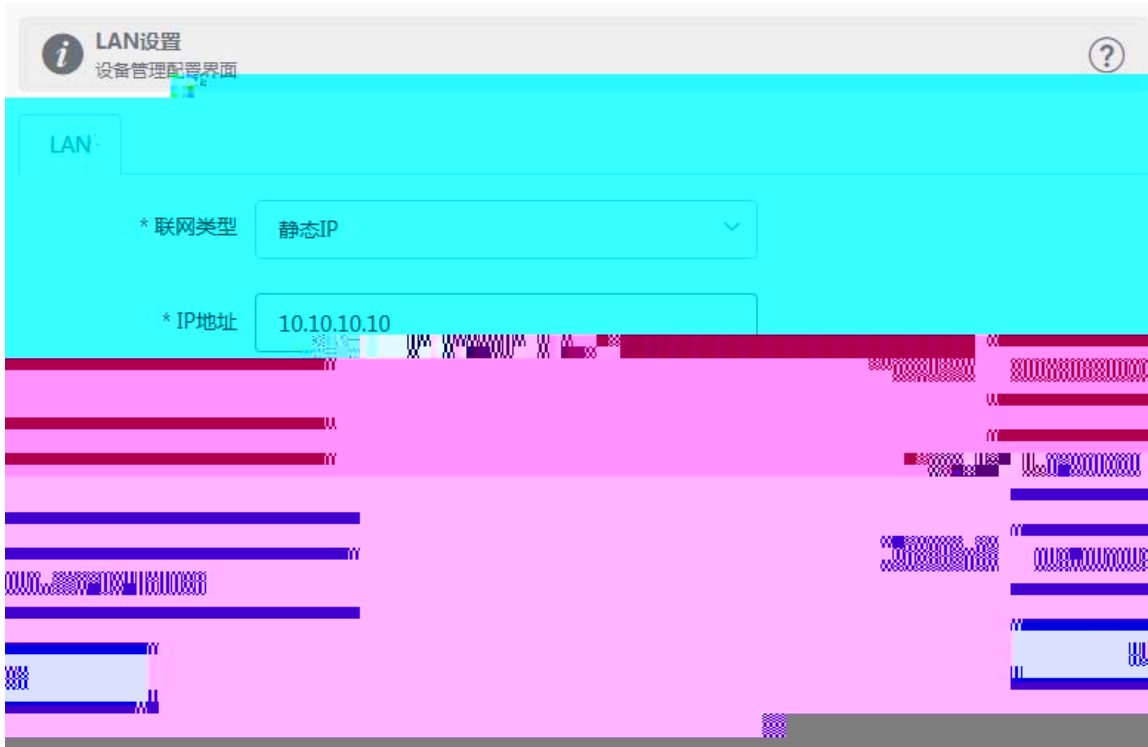


3.3 WiFi

3.3.1

3.3.1.1 CPE

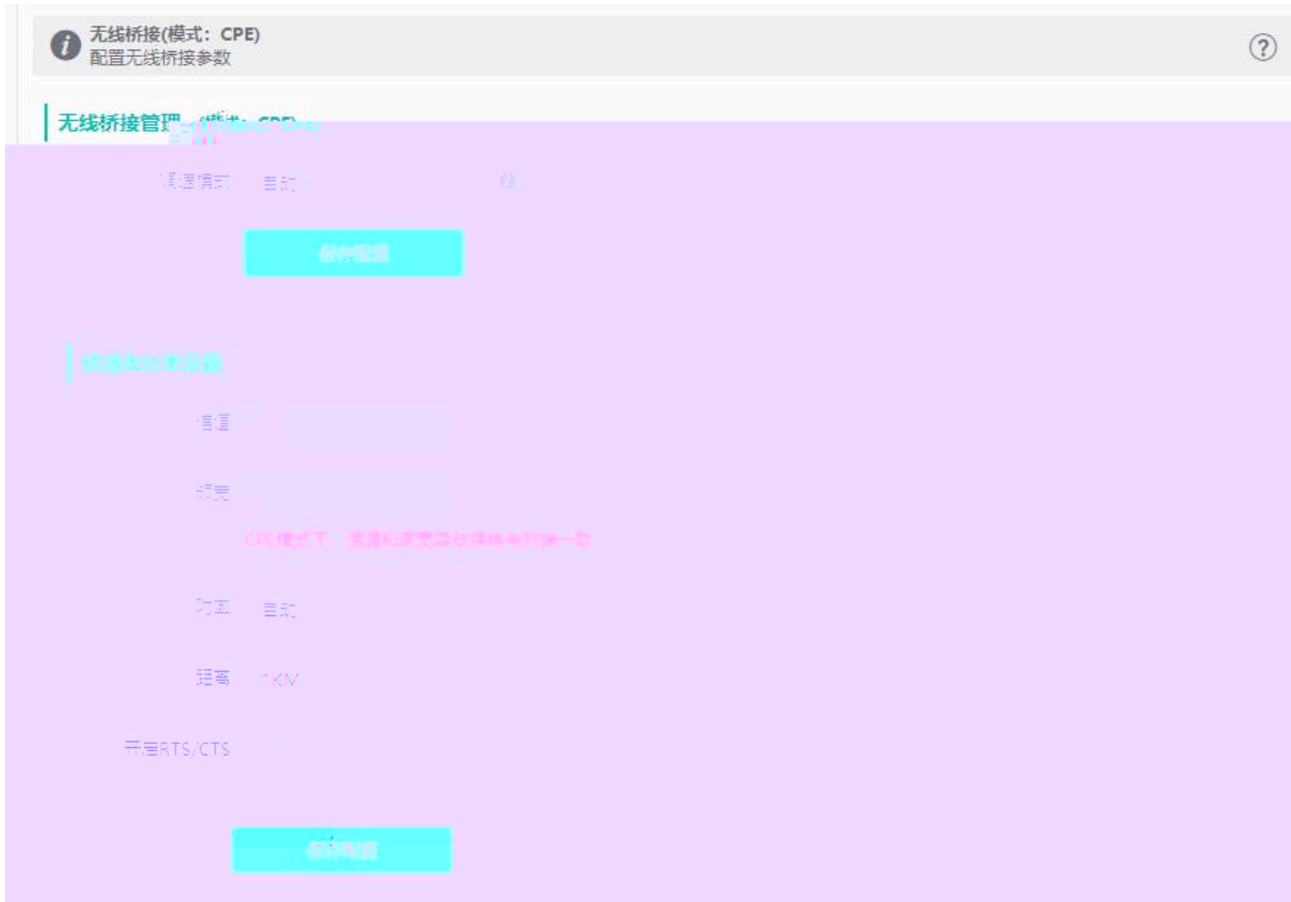

3.3.1.2 AP

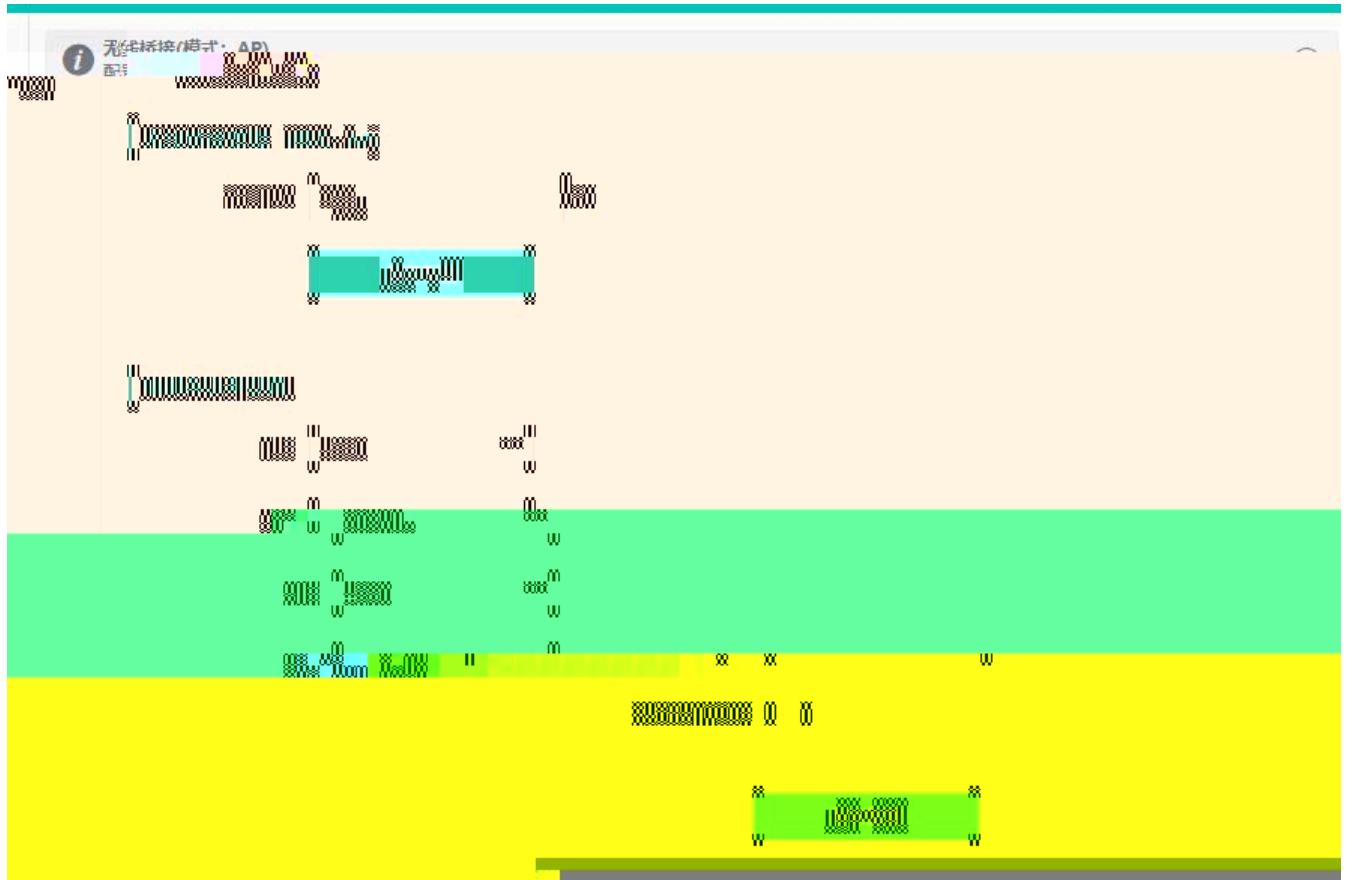

3.4


3.4.1

ping traceroute nslookup


PI NG pi ng



traceroute

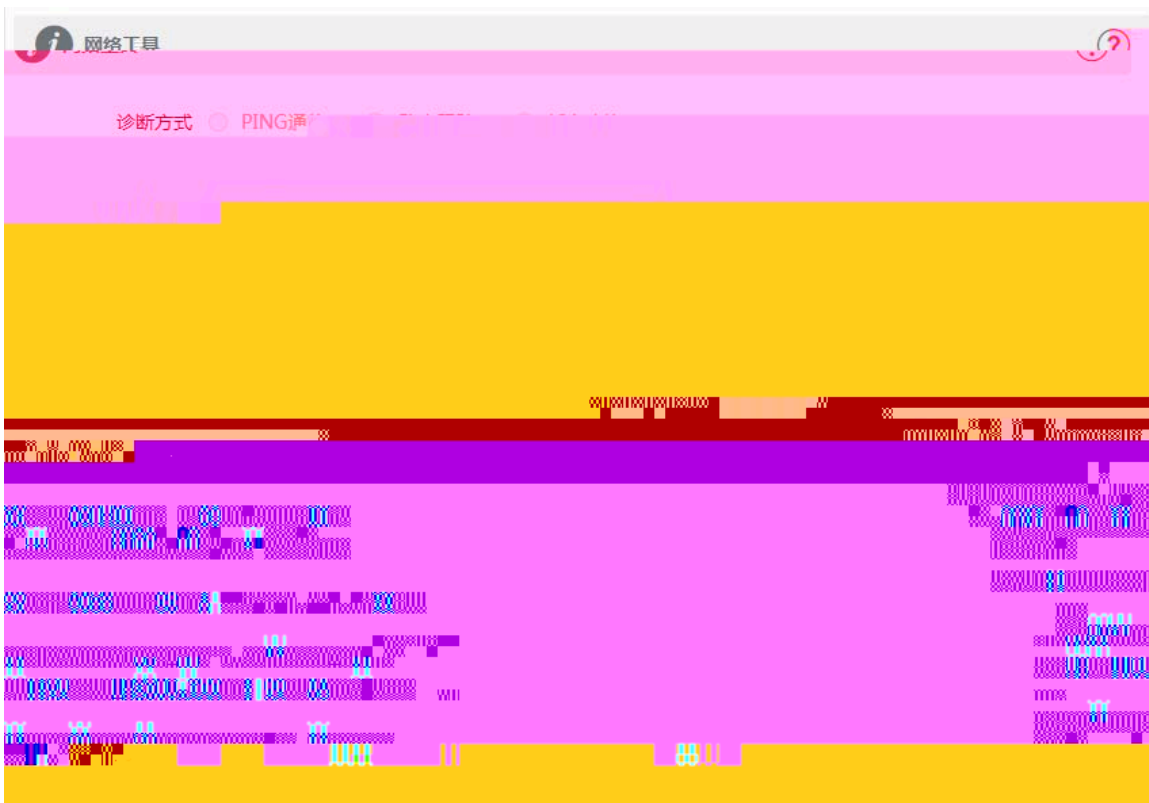

nslookup

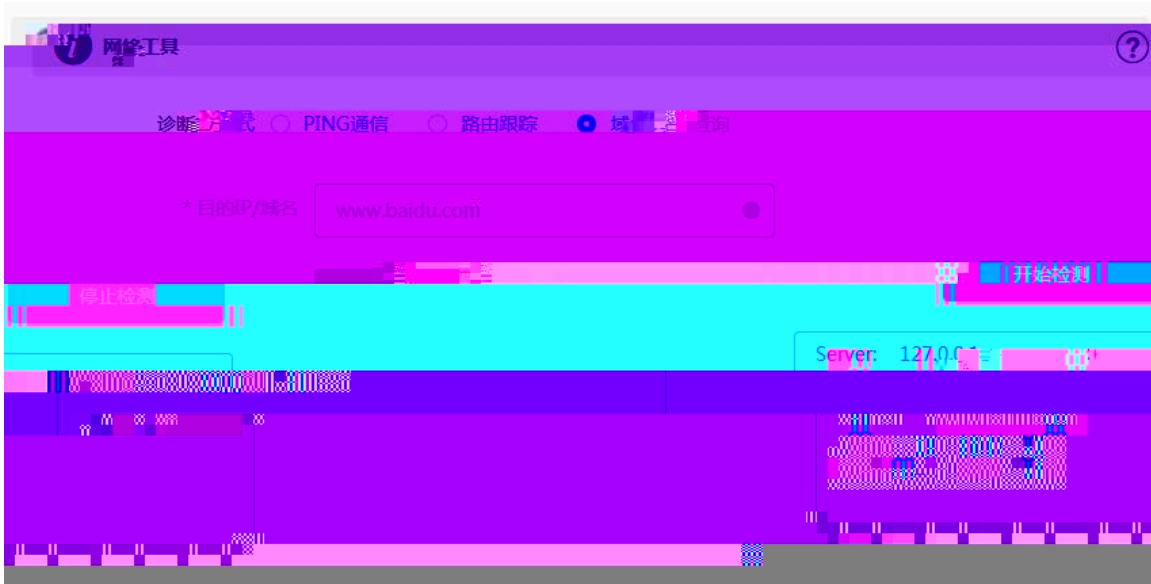

3.4.2



3.5

3.5.1




3.5.2




3.5.3

3.5.3.1

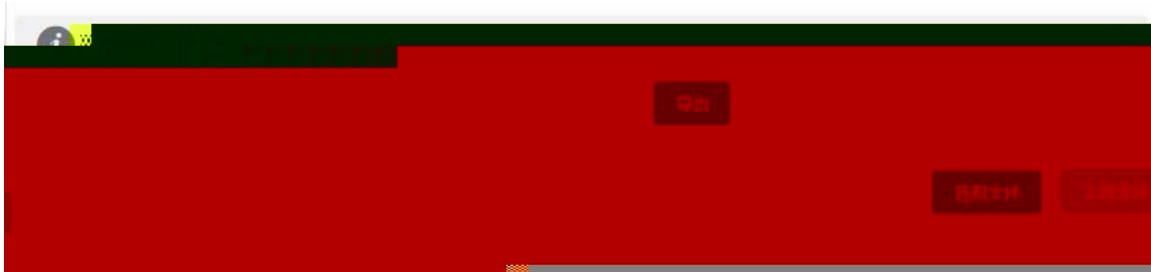

3.5.3.2

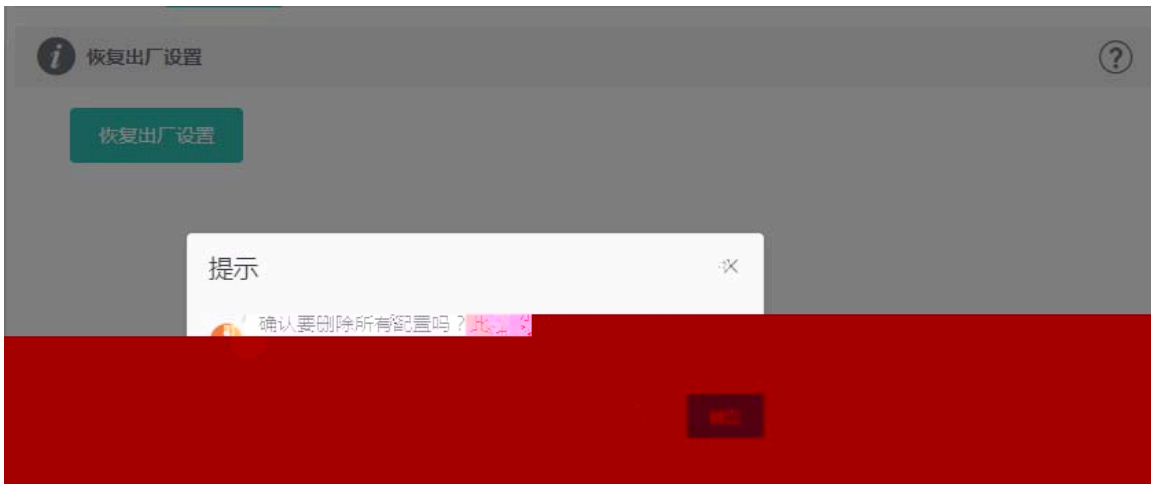

web

3.5.4

3.5.4.1

本地升级

i 本地升级
升级过程中请不要刷新页面或者关闭浏览器。

号 EST302 设备型

本 [模糊] 软硬件版

置 (如果版本差异太大, 建议不保留配置升级) 保留配

包 请选择安装包 选取文件 上传文件 (上传系统升级包) 安装

3.5.5

i 系统重启
在系统重启过程中, 请不要将设备断电!

重启系统

web

web

4

1 Web

1) LAN
2) “ IP ” DHCP IP
IP LAN IP , LAN IP
10.10.10.10 255.255.255.0 IP 10.10.10.X X 2 254
255.255.255.0

3) ping

4) (admin)

2

Reset
Reset 5 Reset
http://10.10.10.10

3

32

8 A 255.0.0.0 16 B 255.255.0.0 24
C 255.255.255.0 32 IP 255.255.255.255