

```

WS18000-1B11#show wlan client
=====
AP      : temp/2
Status : Speed/Basic/Flow/Work Mode/Beaming State/MU,PTMC...
=====
Total sta Num : 39
STA MAC      IPV4 Address  AP      wlan wlan status  Asso-Auth  Net Auth  Up time
-----
F48b.32a3.04e3  temp/2      6  1731  9.0M/E/ac/R/mu  MAB        WEB        0:20:37:33
WS18000-1B11#

```


```

WS18000-1B11#show ac-config client | in mu
===== show sta status =====
AP      : ap name/radio id
Status : Speed/Basic/Flow/Work Mode/Beaming State/MU,PTMC...
=====
Total sta Num : 39
STA MAC      IPV4 Address  AP      wlan wlan status  Asso-Auth  Net Auth  Up time
-----
F48b.32a3.04e3  temp/2      6  1731  9.0M/E/ac/R/mu  MAB        WEB        0:20:37:33
WS18000-1B11#

```

mu终端



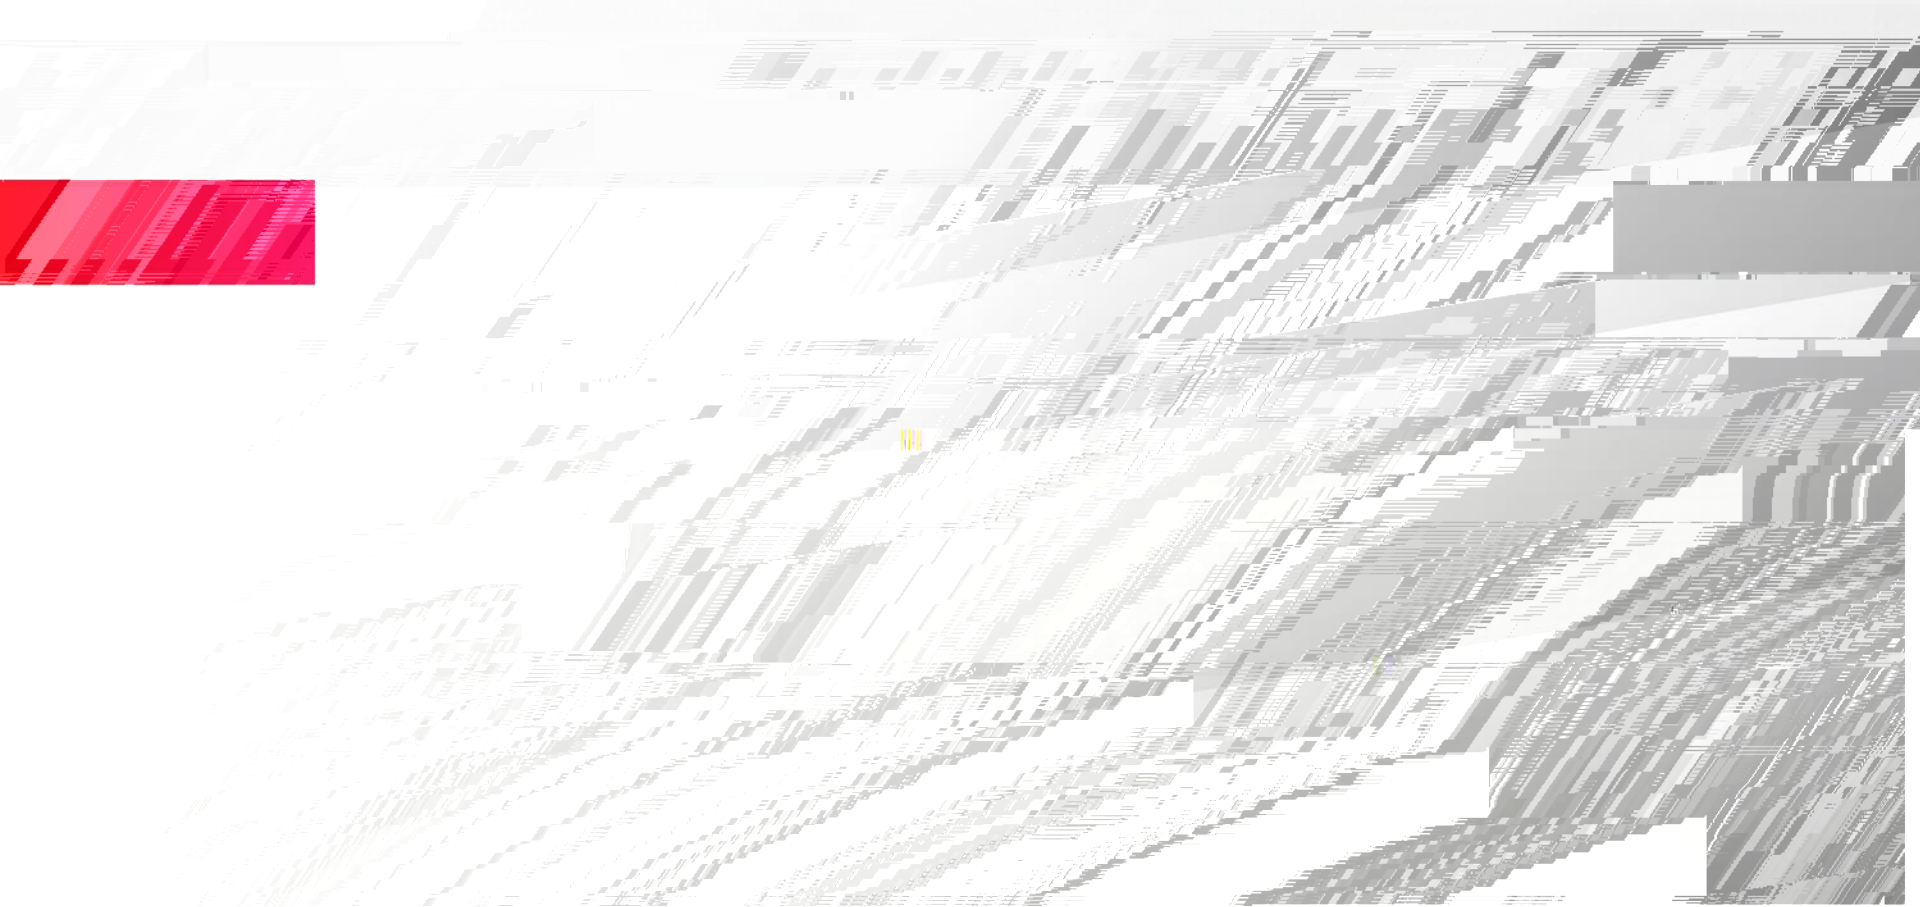













7777

