

SATA
POWER



© 2014 Druille Networks, Inc. All rights reserved.

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/sE93581p>

1Lø átRÉ AN@p6à

1

RG-ACE

RG-ACE

1.1 RG-ACE2000E V2.X

	RG-ACE2000E V2.X																																														
	DDR3 SDRAM 4GB																																														
	BOOTROM 8MB																																														
	FLASH 512MB																																														
	SATA 500G																																														
I/O	<table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">8</td> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">4</td> <td style="width: 10%;"></td> <td style="width: 10%; text-align: right;">0/MGMT</td> </tr> <tr> <td>0/1</td> <td>0/2</td> <td>0/3</td> <td>LAN</td> <td>0/4</td> <td>0/5</td> <td>0/6</td> <td>0/7</td> <td>WAN</td> <td>4</td> </tr> <tr> <td></td> <td></td> <td>7</td> <td colspan="2" style="text-align: center;">WAN/LAN</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td colspan="2" style="text-align: center;">10/100/1000M</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td colspan="2" style="text-align: center;">1000BASE-SX/LX/ZX mini GBIC</td> <td></td> <td></td> <td></td> <td colspan="2" style="text-align: center;">GE-SFP-LX20/LH40-BIDI</td> </tr> </table>		8		4		0/MGMT	0/1	0/2	0/3	LAN	0/4	0/5	0/6	0/7	WAN	4			7	WAN/LAN										10/100/1000M										1000BASE-SX/LX/ZX mini GBIC					GE-SFP-LX20/LH40-BIDI	
		8		4		0/MGMT																																									
	0/1	0/2	0/3	LAN	0/4	0/5	0/6	0/7	WAN	4																																					
			7	WAN/LAN																																											
				10/100/1000M																																											
			1000BASE-SX/LX/ZX mini GBIC					GE-SFP-LX20/LH40-BIDI																																							
	1 0/MGMT																																														
	1																																														

BYPASS

RG-ACE2000E V2.X

ACE


BYPASS
ACE BYPASS

ACE

BYPASS

VLAN

1-1 RG-ACE2000E V2.X

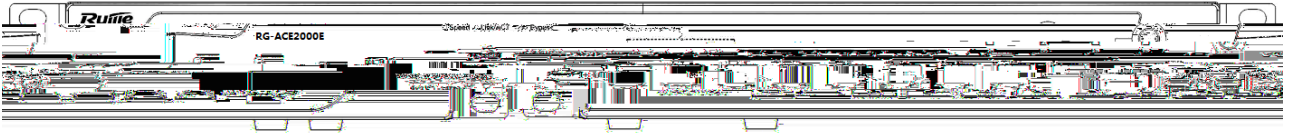

1-2 RG-ACE2000E V2.X




PWR0		0 0 0
PWR1		1 1 1
SYS		
SATA0		0 0
SATA1		1 1
0/0-0/7	link/ACT	/ / Link
0/0-0/7	speed	/
4F-7F		link
OBS0,OBS1	BYPASS	


1.2 RG-ACE2000E V3.X

	RG-ACE2000E V3.X										
	DDR3 SDRAM 16GB										
	BOOTROM 8MB										
	FLASH 512MB										
	SATA 500G										
I/O				8					WAN/LAN	0/1	0/3
	0/5	0/7		WAN	0/0	0/2	0/4	0/6	LAN		
				10/100/1000M							
				1000BASE-SX/LX/ZX mini GBIC					GE-SFP-LX20/LH40-BIDI		
				4			2		0/0, 0/1, 0/2, 0/3		3
				0/4, 0/5, 0/6, 0/7				XG-SFP-SR-MM850	XG-SFP-LR-SM1310		
				XG-SFP-ER-SM1550							
			1				10/100M/1000M				
			1								
	USB		2								
BYPASS				BYPASS	0/0-0/1	0/2-0/3					BYPASS
				BYPASS							
				BYPASS							
	2	RG-PA300I				2					
			2			1		SATA			

1-3 RG-ACE2000E V3.X

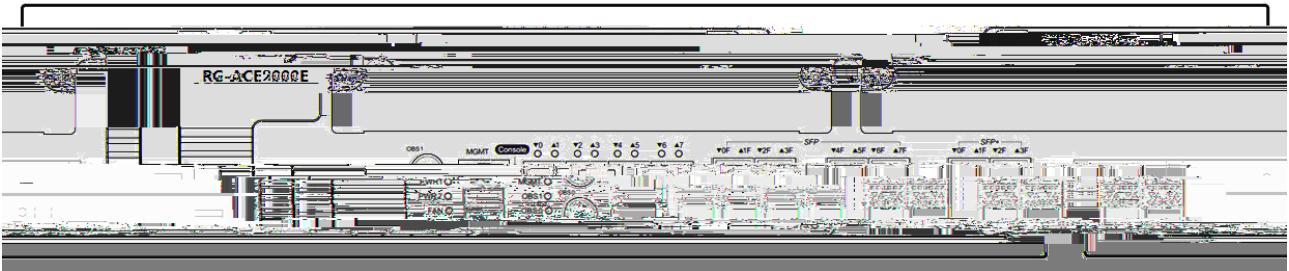

1-4 RG-ACE2000E V3.X

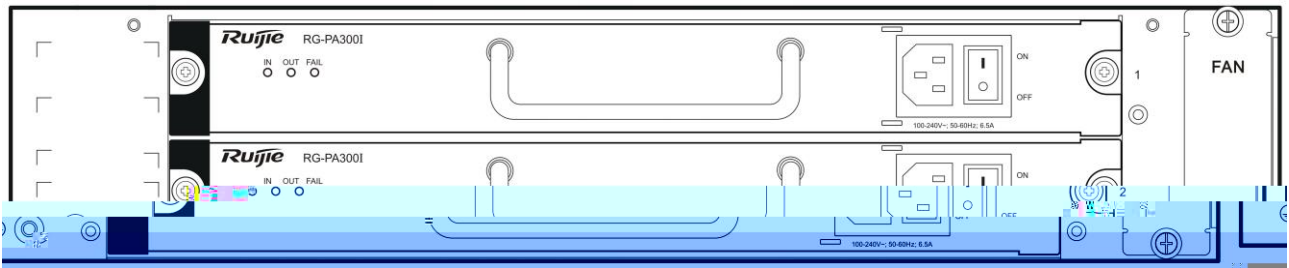


PWR1 PWR2	
SYS	
FAN	
SATA	
Link	link
ACT	
0-7	LINK / LINK
0F-7F	link
OBS0 OBS1 BYPASS	

1.3 RG-ACE3000E




	RG-ACE3000E
	DDR3 SDRAM 16GB
	BOOTROM 8MB
	FLASH 512MB
	SATA 500G
I/O	8 WAN/LAN 0/1 0/3 0/5 0/7 WAN 0/0 0/2 0/4 0/6 LAN 10/100/1000M 1000BASE-SX/LX/ZX mini GBIC GE-SFP-LX20/LH40-BIDI 4 2 0/0, 0/1, 0/2, 0/3 3 0/4, 0/5, 0/6, 0/7 XG-SFP-SR-MM850 XG-SFP-LR-SM1310 XG-SFP-ER-SM1550
	1 10/100M/1000M
	1
	USB 2
	BYPASS 0/0-0/1 0/2-0/3 BYPASS BYPASS
	2 RG-PA300I 2
	2 1 SATA

1-5 RG-ACE3000E

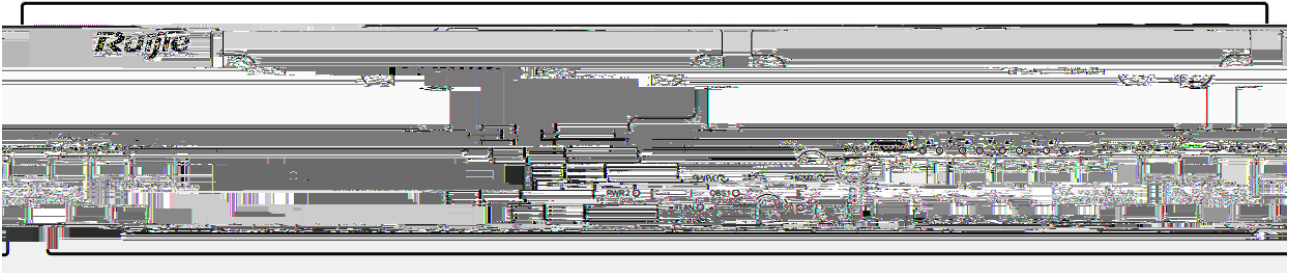


1-6 RG-ACE3000E

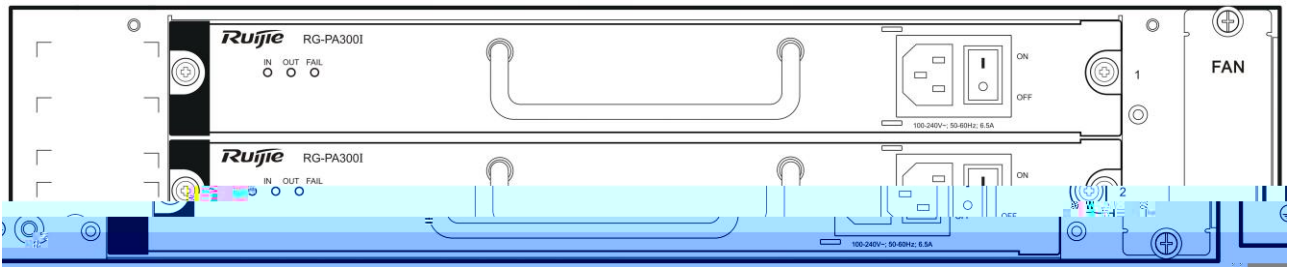

PWR1 PWR2	
SYS	
FAN	
SATA	
Link	link
ACT	

LINK
/ LINK


1.4 RG-ACE5000E




BYPASS

EXT3

1-7 RG-ACE5000E

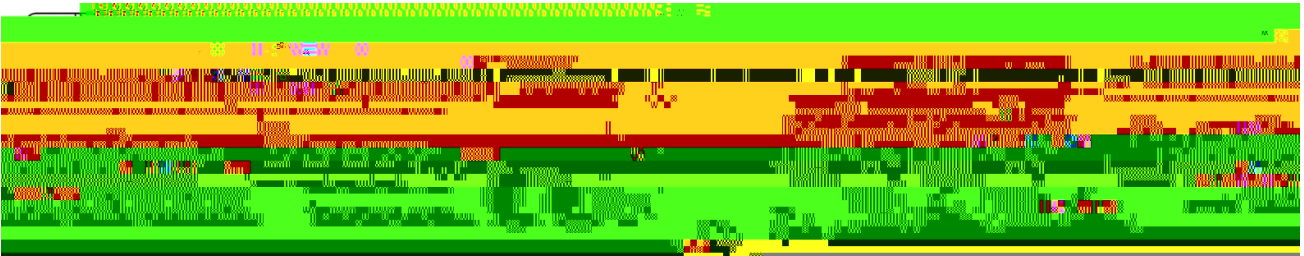

1-8 RG-ACE5000E

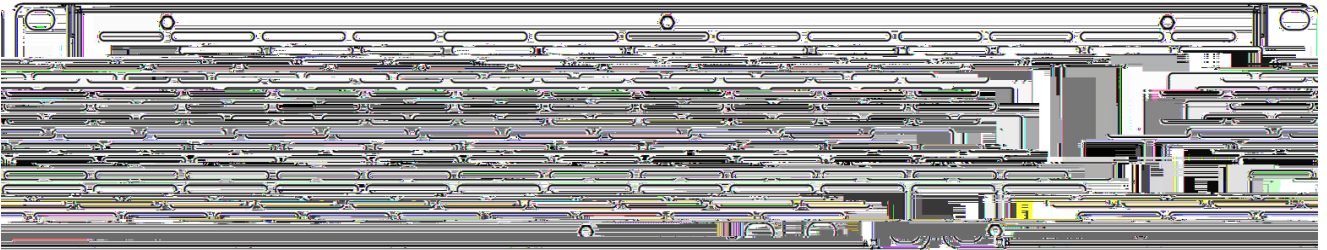

Δf33β1R,R320EεB02R0B0NVS

PWR	AC 0.5Hz 1Hz 0.5Hz

SYS

	/
0-7 0-7 0-1 40G	link
OBS BYPASS	

1.5

1.5.1 RG-PA300I

1-9 RG-PA300I



RG-PA300I

RG-ACE2000E V3.X


RG-ACE3000E

IN	
OUT	
FAIL	

1.5.2 RG-M5000E-AC60

1-10 RG-M5000E-AC60

(2)

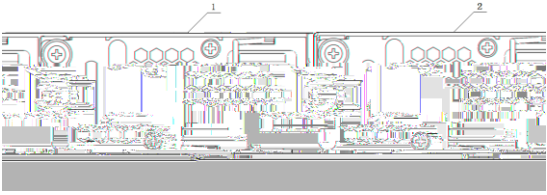

RG-M5000E-AC60

RG-ACE2000E V2.X

	AC





RG- YM-2301EDR


RG-ACE5000E

PWR	AC 0.5Hz 1Hz 0.5Hz

	100-240V~ 50-60Hz 5~3A
	12V 24A 5Vsb 3A
	300W
N+1	

1.5.4 ENM-4GE-S

1-12 ENM-4GE-S

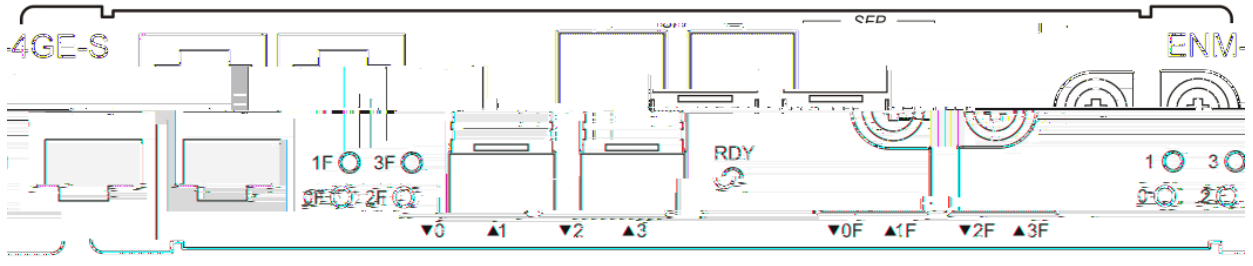

ENM-4GE-S

RG-ACE2000E V3.X

RG-ACE3000E


2

2.1

UPS

3

3.1

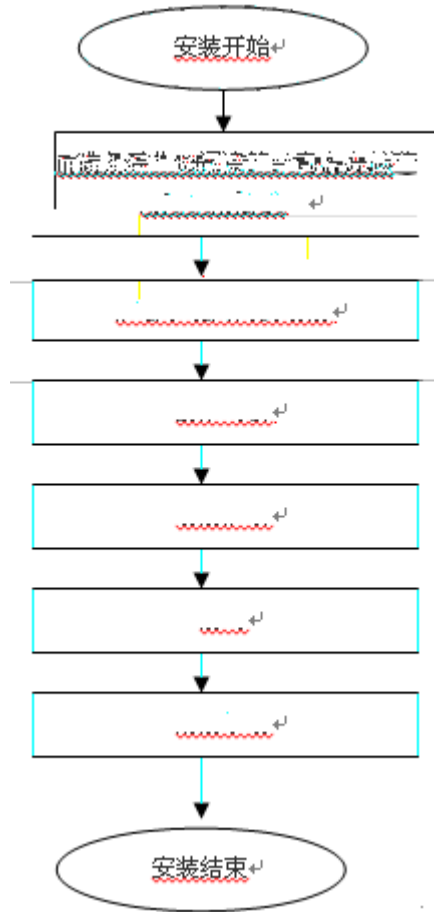

3.2


3.6

4


4.1 Console

Console

4-3



4-4

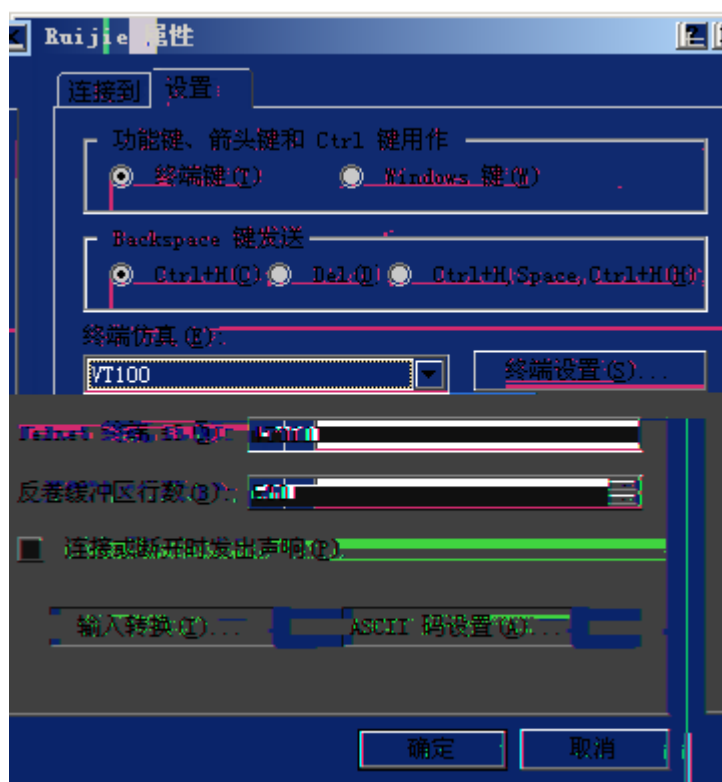

4.2

" ON"

" "

```
*****
Boot 1.2.17-00441-g0c1ac26 (Build time: May 20 2015 - 18:29:47)

DRAM: 16 GiB
NAND: 512 MiB
Flash: 8 MiB
SETMAC: Setmac operation was performed at 2015-05-22 16:15:00 (version: 11.0)
Press Ctrl+C to enter Boot Menu
Creating 1 MTD partitions on "nand0":
0x000000800000-0x000004000000 : "mtd=1"
UBI: attaching mtd2 to ubi0
UBI: physical eraseblock size: 131072 bytes (128 KiB)
UBI: logical eraseblock size: 129024 bytes
UBI: smallest flash I/O unit: 2048
UBI: sub-page size: 512
UBI: VID header offset: 512 (aligned 512)
```

```
UBI: data offset:          2048
UBI: attached mtd2 to ubi0
UBI: MTD device name:     "mtd=1"
UBI: MTD device size:     56 MiB
UBI: number of good PEBs: 448
UBI: number of bad PEBs:  0
UBI: max. allowed volumes: 128
UBI: wear-leveling threshold: 4096
UBI: number of internal volumes: 1
UBI: number of user volumes: 1
UBI: available PEBs:     69
```

4.3

5

5.1

RG-ACE

PWR

PWR

5.2

9600

8

1

VT100

#