



N eY

I JI *' \$0

I > F J (' % Ž* Y. - žg +

M(%

©2018

8D494neS 1 Tf 9 0 0 EMC /P <</1.38B 8D325A82D494neShC2_0 17q 159.3441803 33.72 162.01901C4

RGOS 10.4 (3b76)p4

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

7× 24

4008-111-000

<http://bbs.ruijie.com.cn/portal.php>

<http://www.ruijie.com.cn/service/know.aspx>

4008111000@ruijie.com.cn

--	--

[] []

{x|y|...}

[x|y|...]

//

2)

(N eY

(%

I JI *' \$D

1.1.1

N \Y @ =i\]fo :_if d \

N \Y N \Y N \Y N \Y
N \Y @ =i\]fo :_if d \

1.1.2

N eY

N \Y N \Y ? KKG
? KKGJ KCJ (%)

N eY

N \Y N \Y N \Y N \Y N \Y
@ =i\]fo :_if d \ JX]Xi`

(%

1.2.1

N \Y

N \Y

@

N \Y N \Y N \Y
@ =i\]fo :_if d \ JX]Xi` @ Ž D Xokf ež
N \Y
G: () / ' ! (') +
(++' !O' ' N \Y

1.2.2


N \Y (O) %- / % %) , , % , , % , , % N \Y
X[d `e X[d `e N `e[f n j OG

N eY

N \Y	
N \Y	><' # (O) %- / % %
N \Y	X[d `e X[d `e


G: G: ><'
G: G:
G: @
G: \$> \$> @kie\k \$>"

(\$

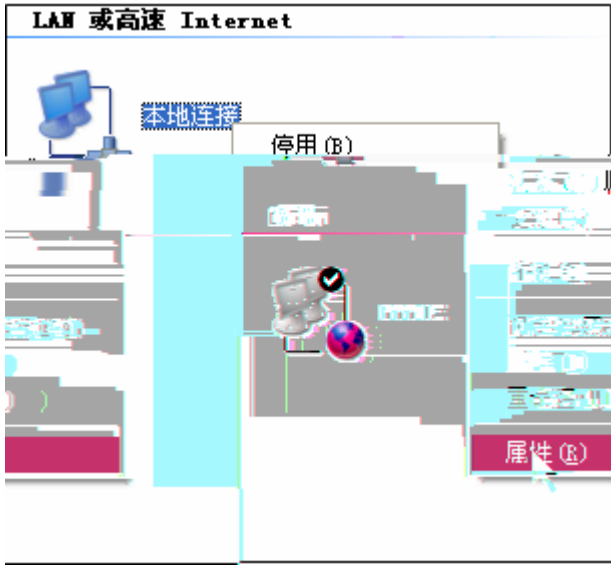

@kie\k K: G&&

(\$)

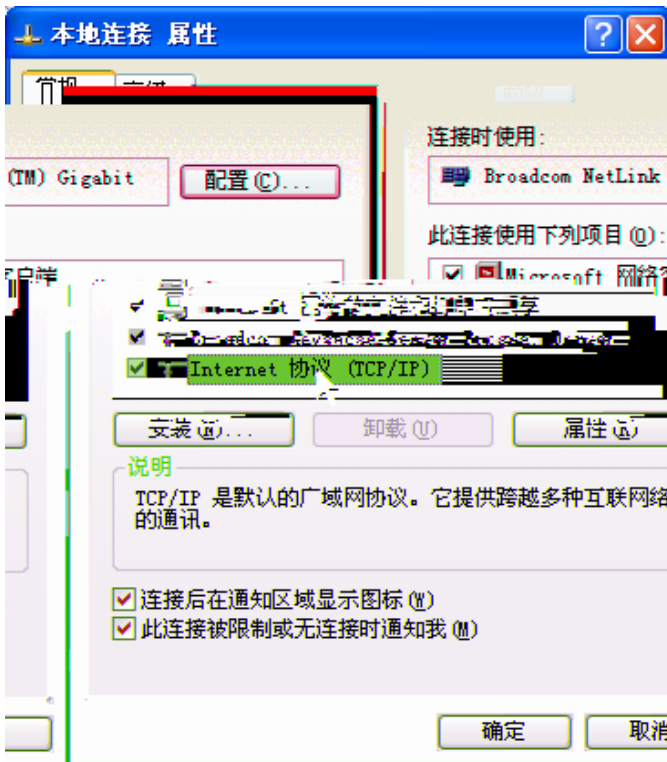

G: &

@kie\k

K: G&&

&

&

(O) %- / % %oo ooo


) , +

), , %, , %, , %

(O) %- / % %

&

(\$*



⚡ (O) %- /%% G: Ⓞ (#

G:
G: \$> \$> Zd [\$>"
Ge^ Ge^ (O) %- /%%
(\$+

```
Pinging 192.168.1.1 with 32 bytes of data:  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
  
Ping statistics for 192.168.1.1:  
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
    Approximate round trip times in milli-seconds:  
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

(\$

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

⚡

⚡ G:


⚡ K: G&&

⚡

1.2.3 N eY

```
      N \Y                                N \Y
(ž                ><'
)ž                                @. %
*ž                @                @                (O) %- /%%000 000 ) , +
), , %, , %, , %                (O) %- /%%
@                _kg &&(O) %- /%%                I JI                N \Y                ($
      N \Y                @/"                8ggd JX]Xi`                =i\]f o*%
```

(\$

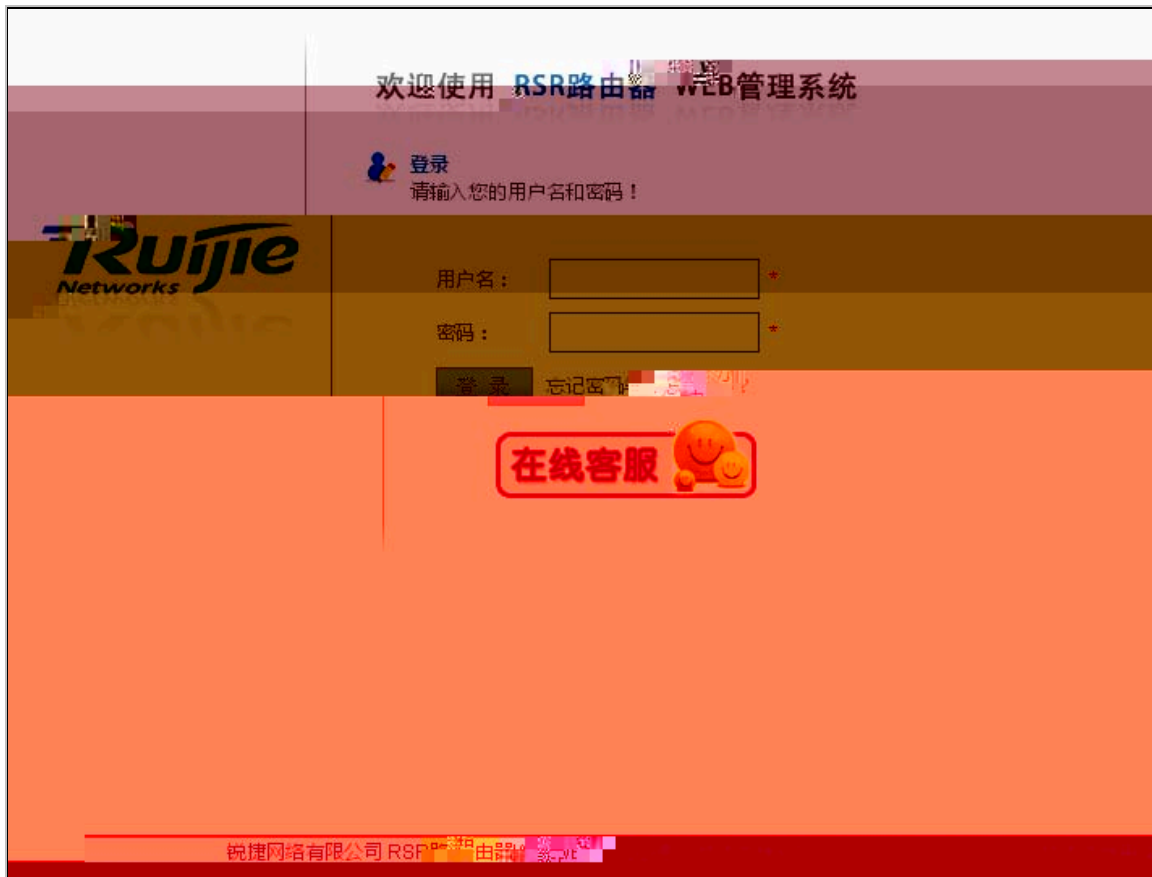

1.2.4 Net

(%%%)

IJI NY (\$/

(\$/ NY



(\$/ NY




1.3.2

N \ Y

Ⓒ &D Xj b GGGf <ŽB; J Cz

(\$ '

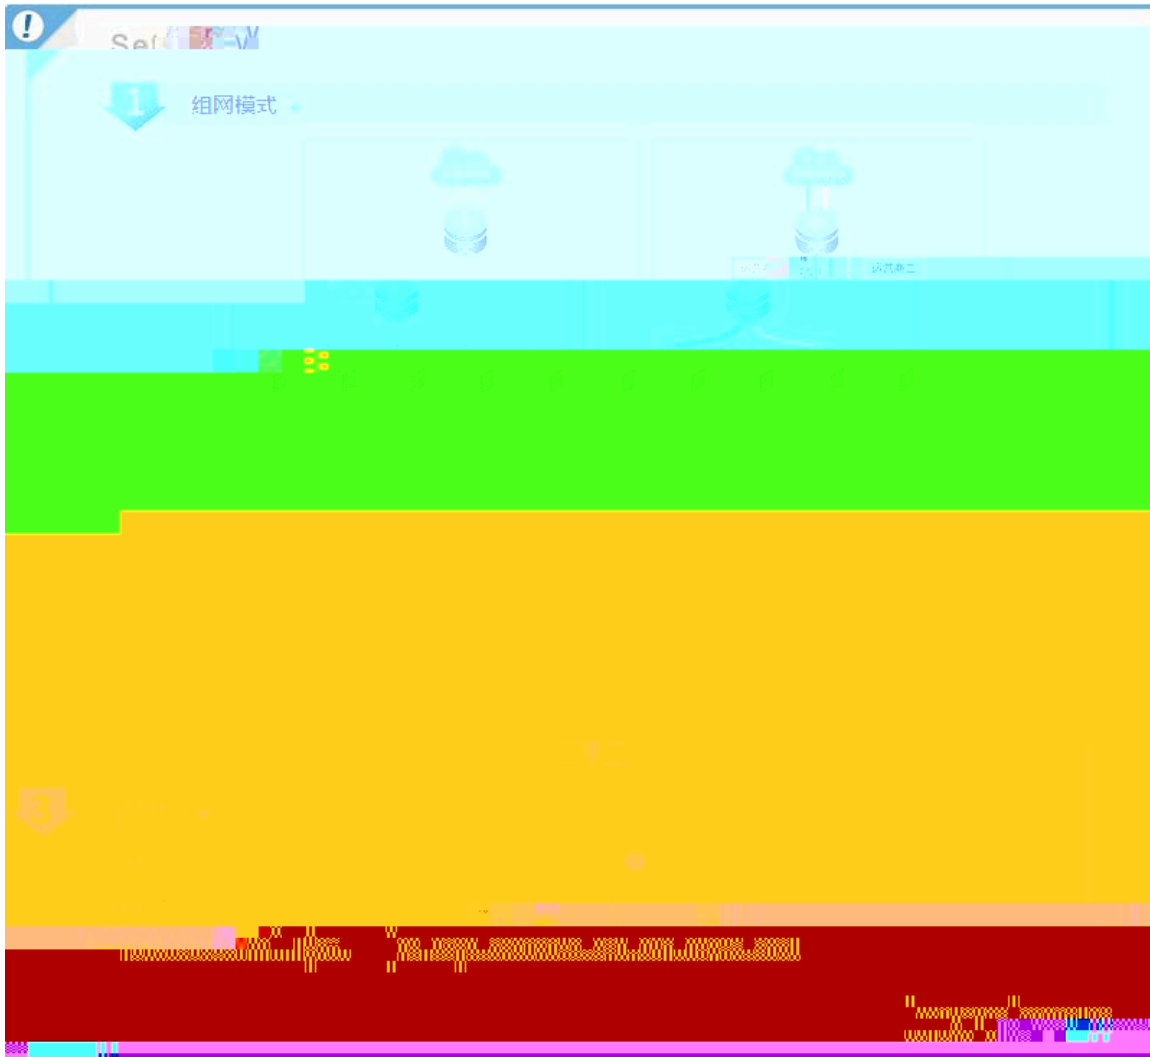

(S(



© &

; EJ (\$; EJ ; EJ



? ED \$/ < (& < N \Y ? ED \$/ < (& < < <
 / < N \Y / (<
 (\$*)



< (' +/ BY`kj J\i`Xc' &) &E 1 E E 1 \$

: <(

(S-



K: G L; G



(- , , * ,



(- , , * ,

(S.

添加端口映射

映射类型: 整机映射

内网IP: *

公网IP: 使用接口地址 GE0/0/8

确定 取消




(%%% ; ? : G

; peXd `Z ? fjk : fe]`^l iXkfe Gifkf Zf #; ? : G ; ? : G
Ⓞ ; ? : G Ⓞ Ⓞ Ⓞ

; ? : G

; ? : G ; ? : G

(\$)

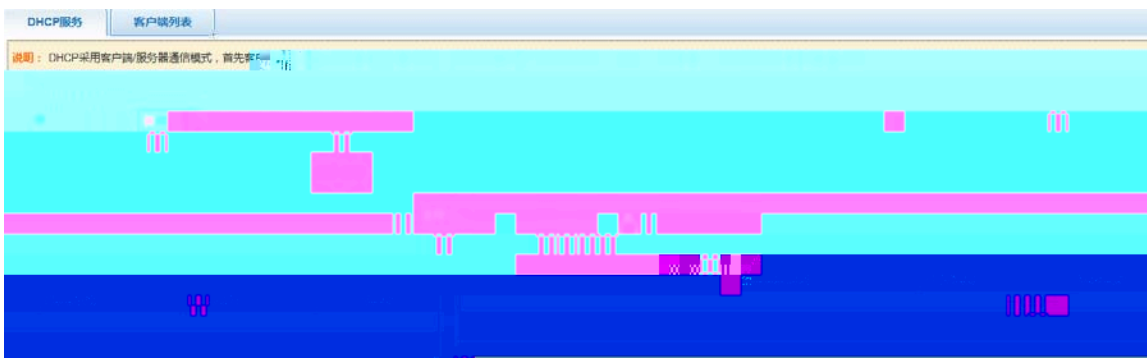

; E J

C8E

(\$)



@

@

@

; ? : G

; E J

; E J

; E J

; E J

@

; ? : G

@

D 8:

@

(\$) *

添加静态地址池 [X]

地址池名称: * (请勿输入& ? % 和 空格等字符)

IP地址: *

掩码地址: *

MAC地址: * (格式为: 00d0.f822.33d)

网关地址:

首选DNS:

备用DNS:

Ⓜ Ⓜ

Ⓜ

D 8: D 8:

Ž ž

; E J ; E J Ž ž


⚡ D 8: Ⓜ

(% % % M I G

M I G

⚡ M I G

(\$) +

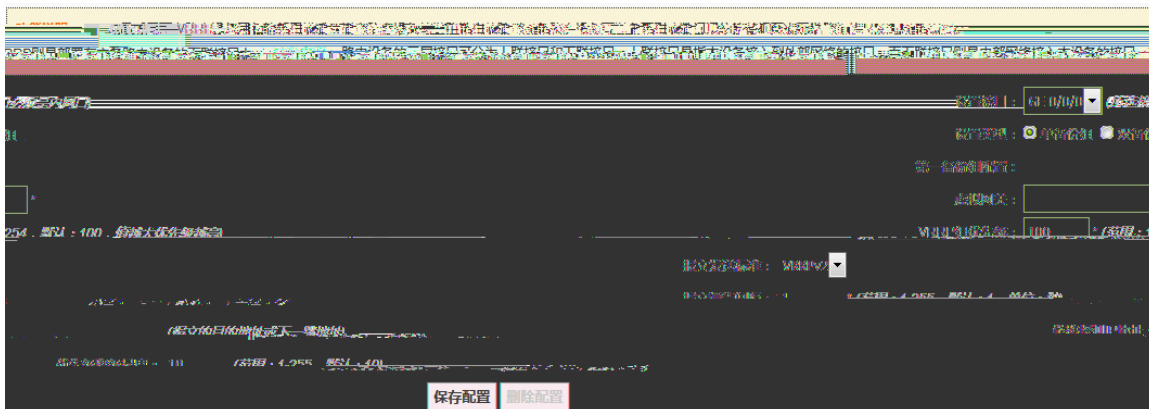


(%%%) J E D G

J E D G J 'd g\ E \knf ib D XeX^d \ek Gif kf Zf c

J E D G

J E D G


(\$),

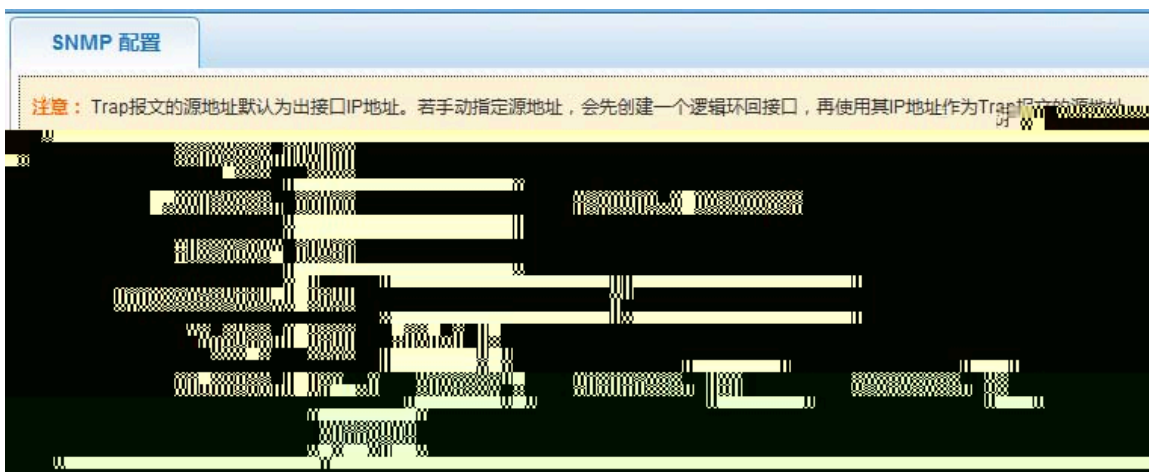

1.3.4

(%%%)

(\$) -

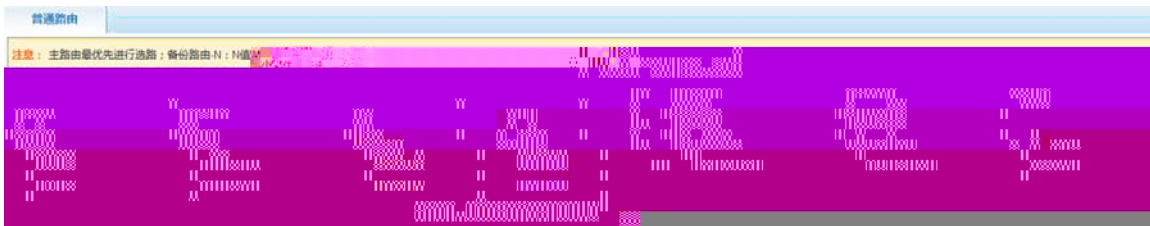

Ⓞ


Ⓞ

Ⓞ

(

' %%%

(\$) .

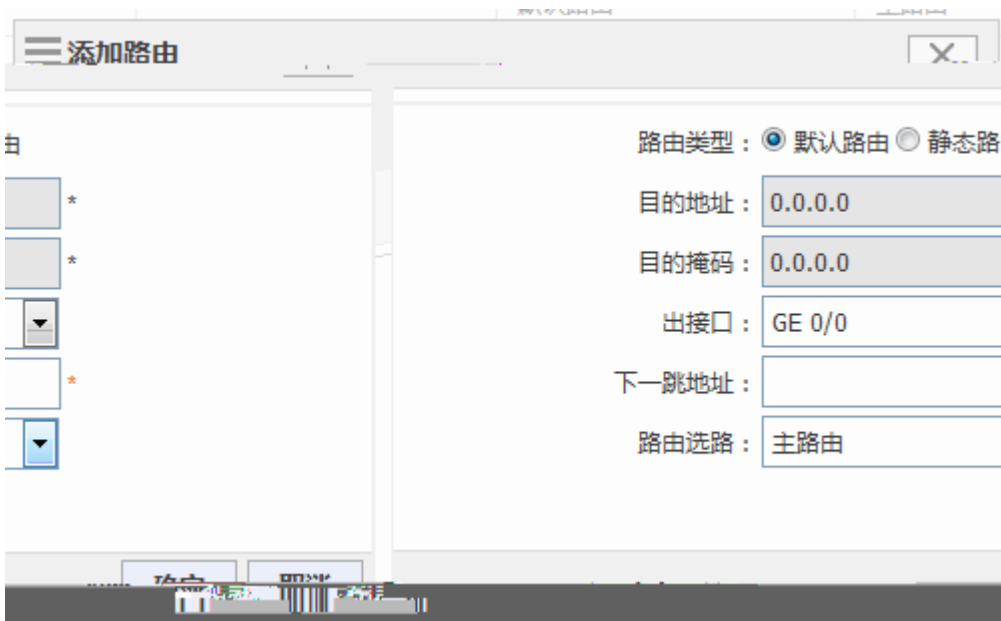

(%%%

G9I Gf cZp\$9Xj \[I f l Ke ^

Ⓞ

(\$) /



F JG=

F JG=

F JG=


F JG=

F JG=


(\$*



(\$*

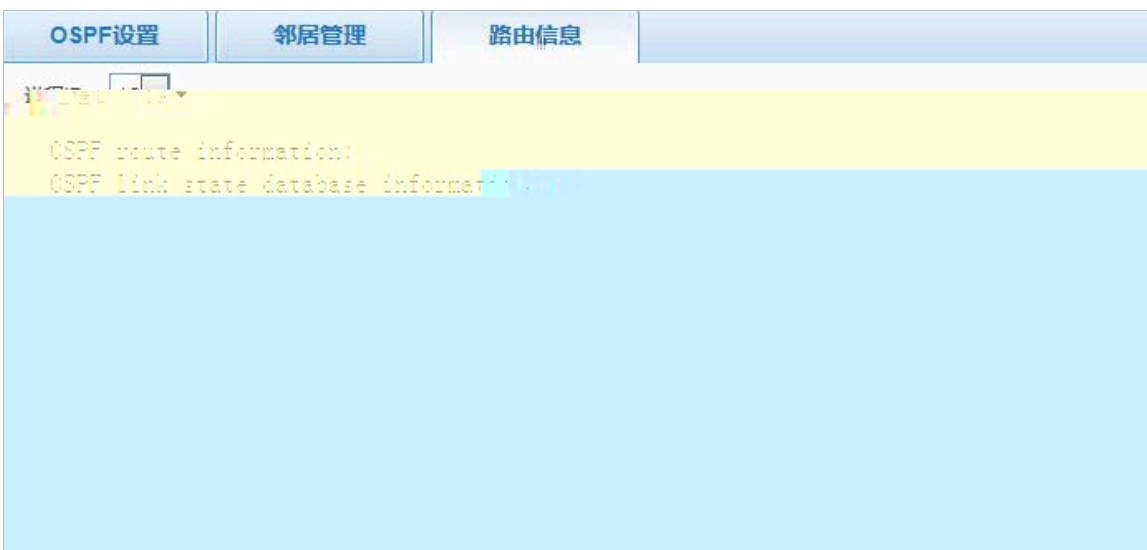


(\$* +

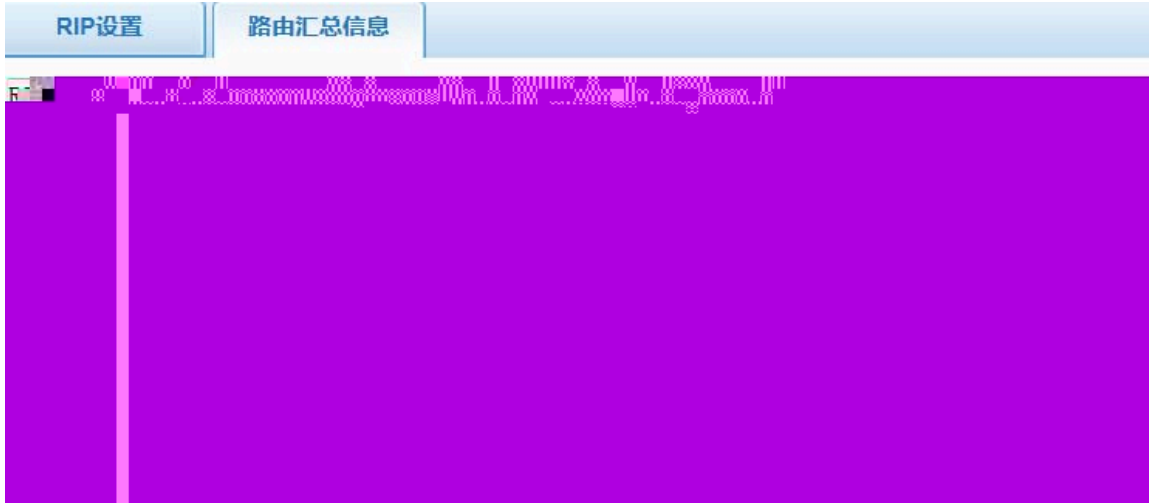

(%%%

F

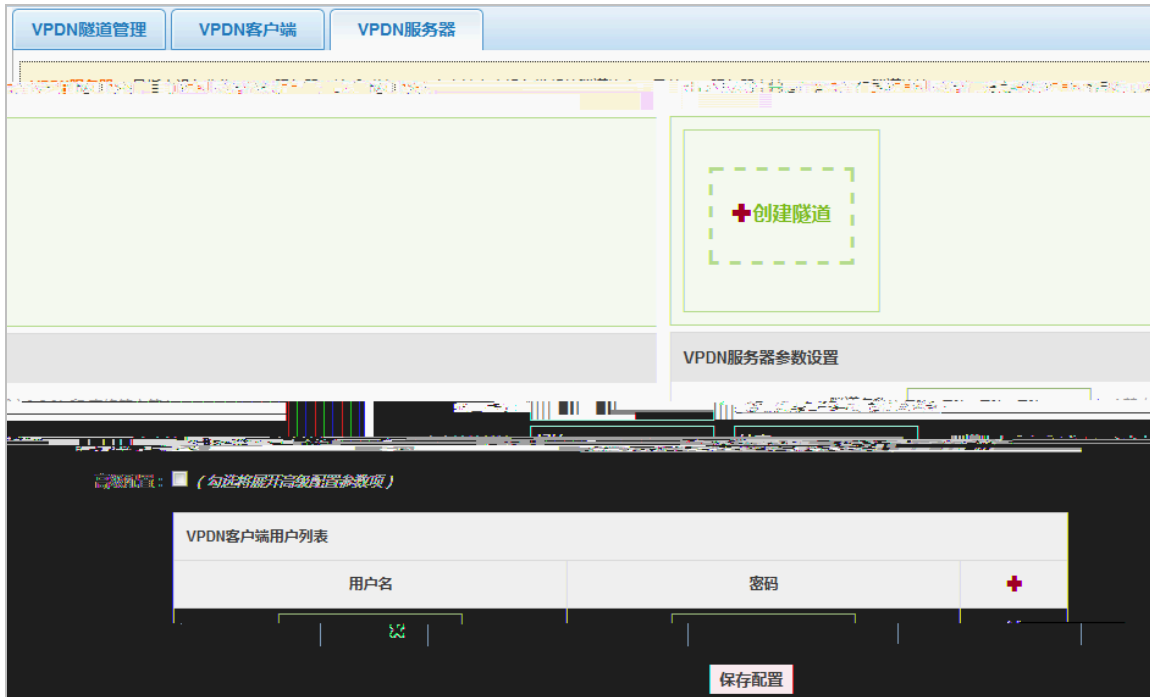


(%%% >| <

>| < >| <

>| <

>| <

(\$*0

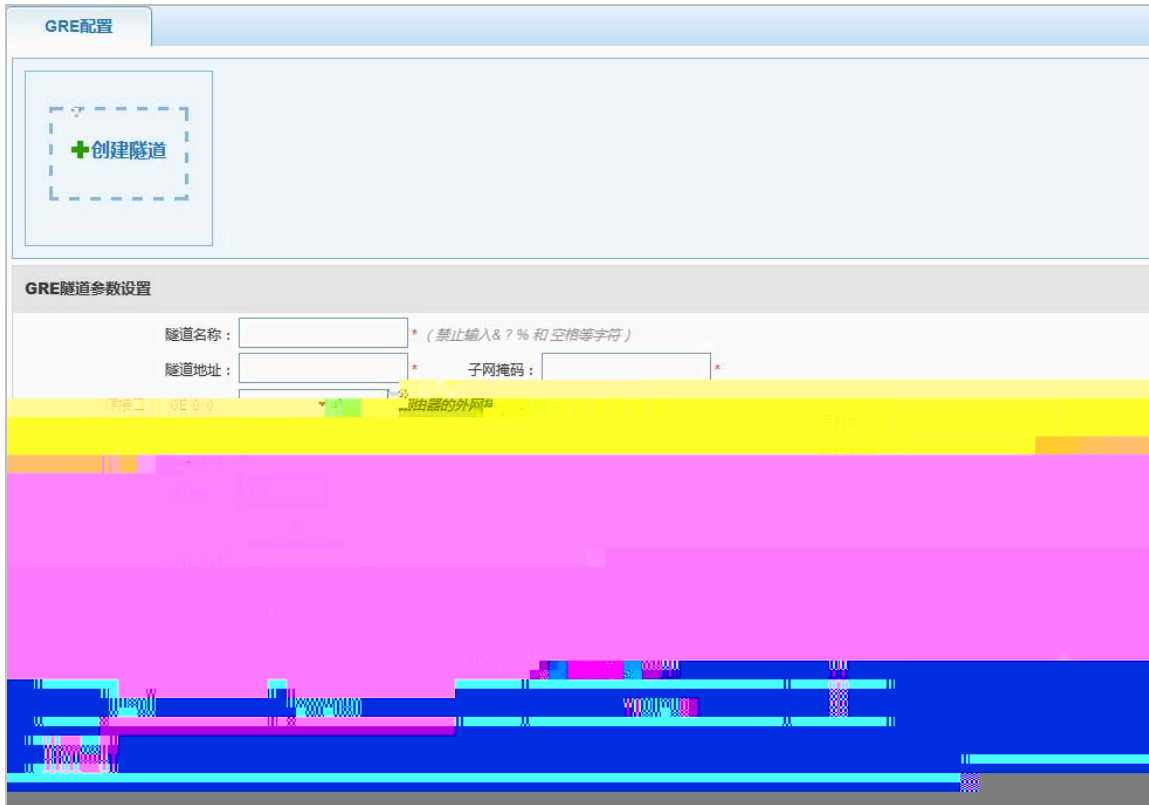

(%%% @JeZ MGE

MGE

@Kie\k

@Kie\k

@J\Z


@J\Z

@JeZ

@J\Z

@J\Z D @

(\$'

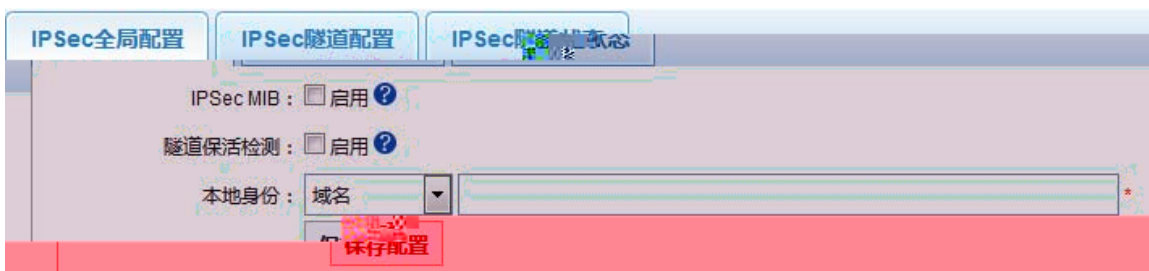

ⓂJeZ

ⓂJ\Z


Ⓜ - Ⓜ
ⓂJ\Z

MGE

Ⓜ< Ⓜ<

; <J *; <J 8<J JD (J? 8 D;;
<JG\$ <J <JG\$*; <J <JG\$*; <J <JG\$? 8\$? D 8: <JG\$*; <J <JG\$D;; \$? D 8: <JG\$ <J
<JG\$? 8\$? D 8: <JG\$ <J <JG\$D;; \$? D 8:


(\$+(

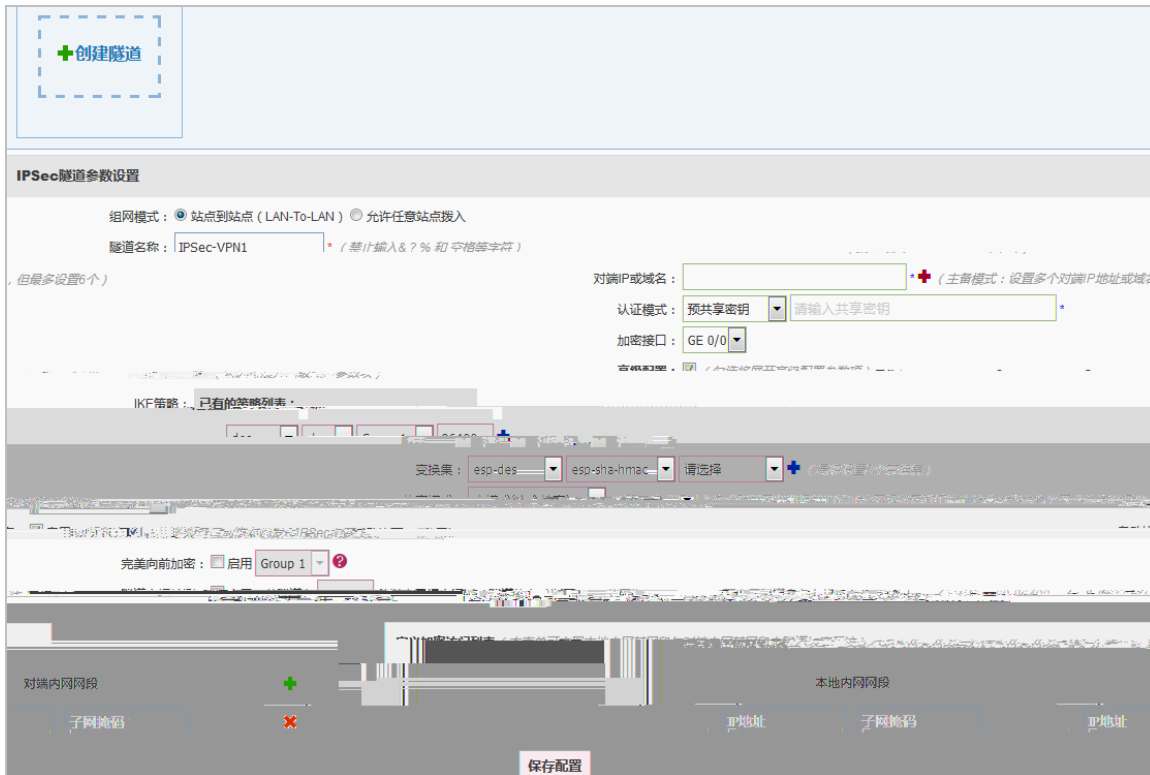

ⓂJeZ

ⓂJ\Z


(\$+)

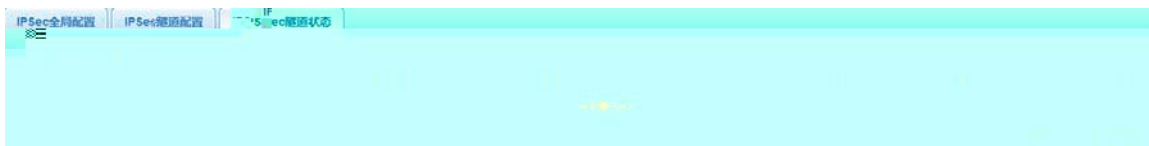


1.3.6

(%%%)

(\$+*

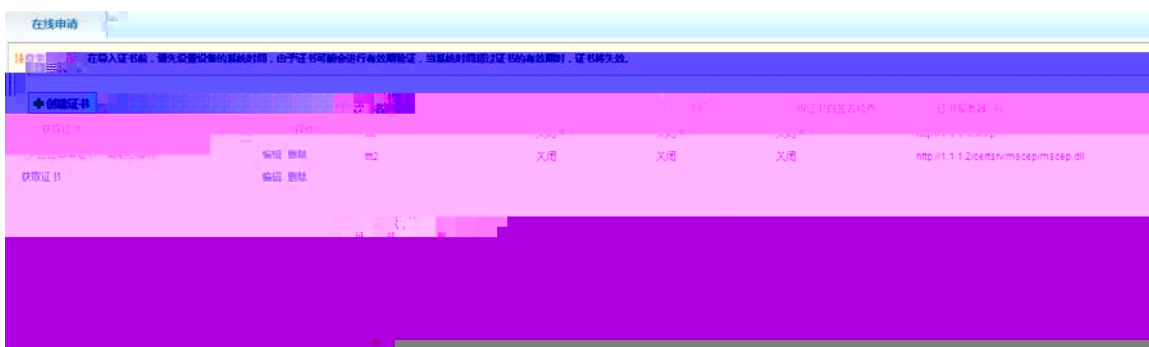

(\$++

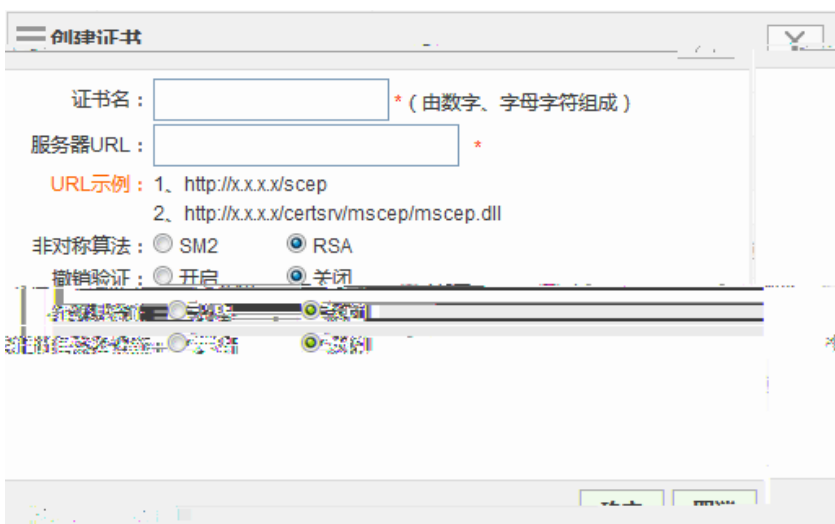


(\$+,



(%%%

(\$+-

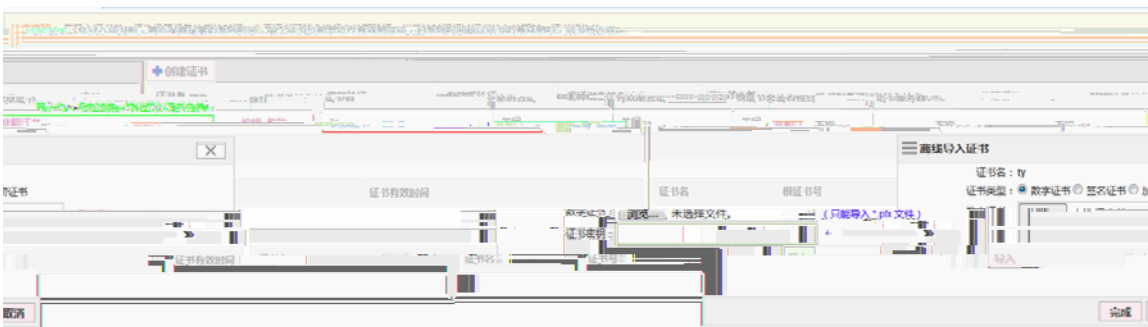

(\$+.

离线导入证书

证书名: ty

证书类型: 数字证书 签名证书 加密证书

设备DN信息

通用名: * (例如: 20_14E)

部门: * (例如: Tac)

单位: * (例如: Ruijie)

城/县: * (例如: Chengdu)

省(直辖市): * (例如: Sichuan)

国家(特别行政区):

证书请求:

证书ID:

根证书: 未选择文件. *


路由器证书: 未选择文件. *

(% ; E

)%

G:

(\$+/
*

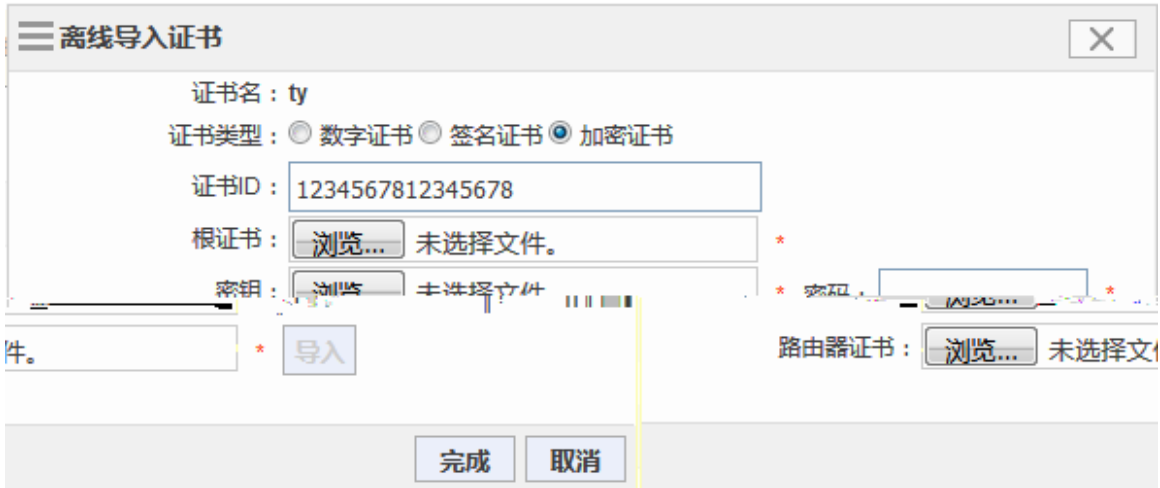

1.3.7 AAA

```
888 8l k_\ekZXkfe 8l k_fi`qXkfe Xe[ 8ZZfl eke^
```

```
888
```

```
l 8; @J      K8: 8: J"      Cf ZXc
```

```
888
```


```
888
```

Web

AAA


l 8; @J

(\$+0

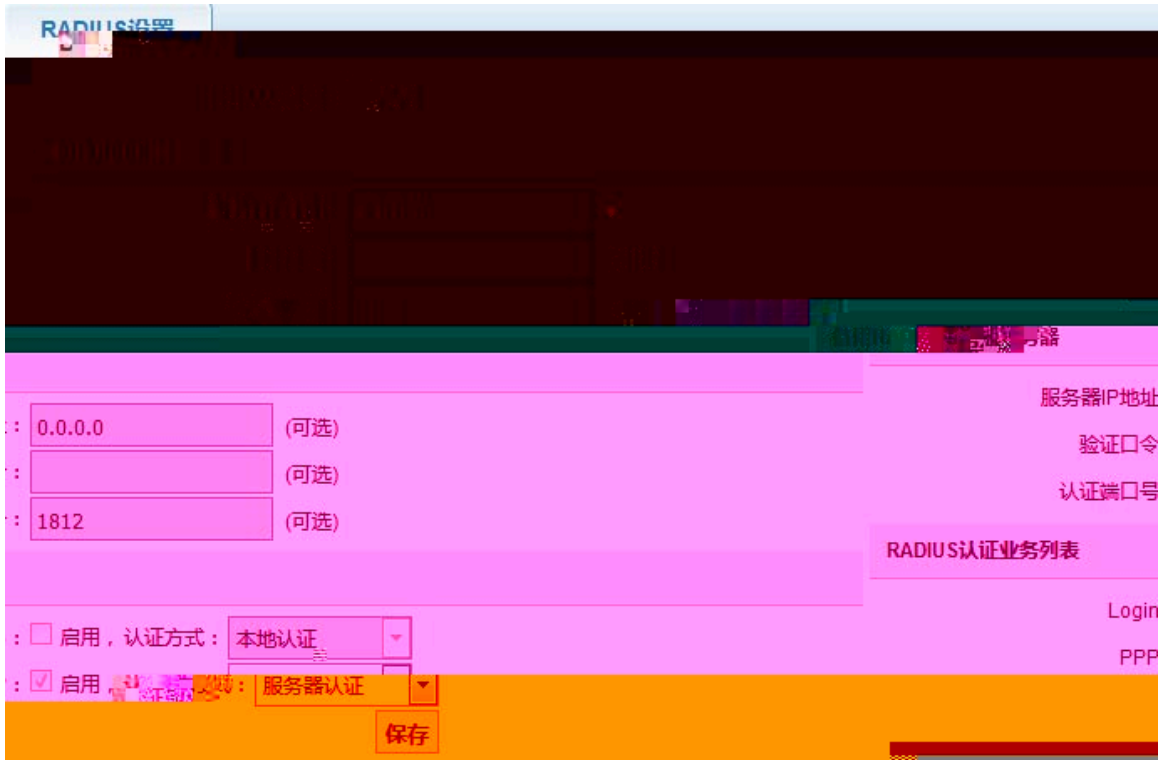

1.3.8

(% % %

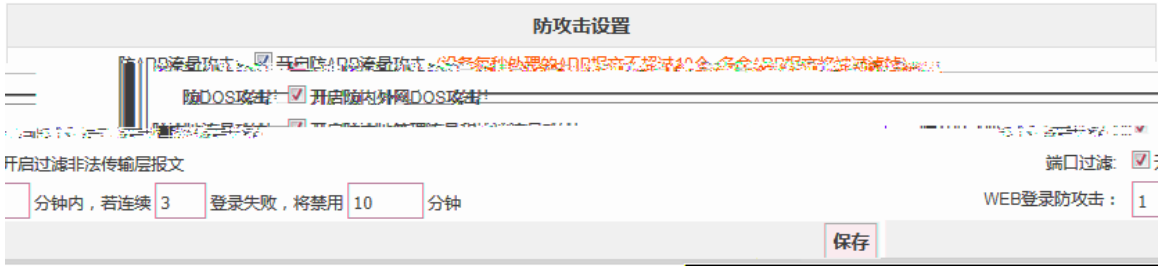


(%%% @SD A:

@SD A:

@SD 8: @SD 8: @ D 8: @SD 8:
8I G @SD 8:
@SD 8:

(\$ (

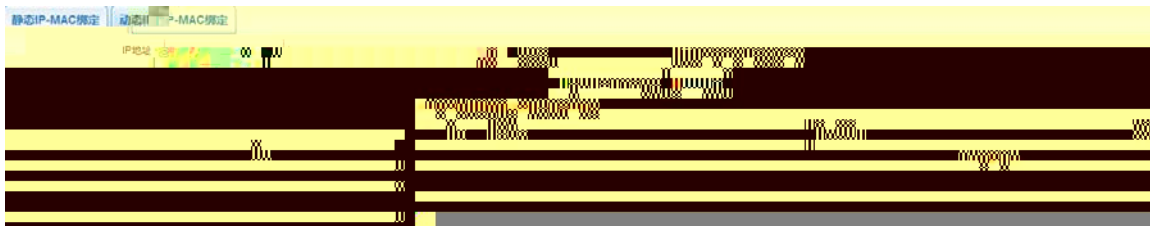


@ D 8: @
D 8: @ D 8:


@SD A:

@SD 8: 8I G @SD 8:
@SD 8: @SD 8:

(\$)

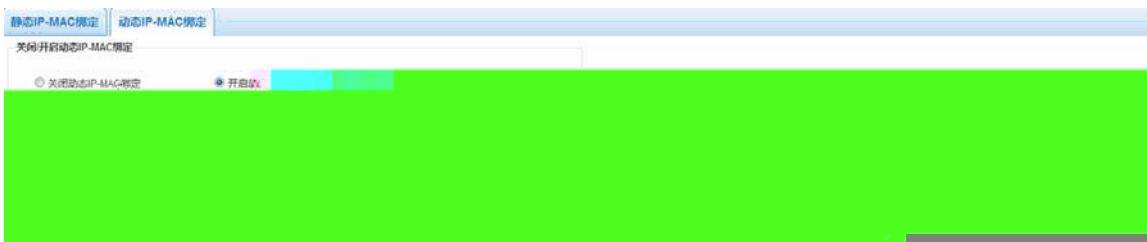

(\$,

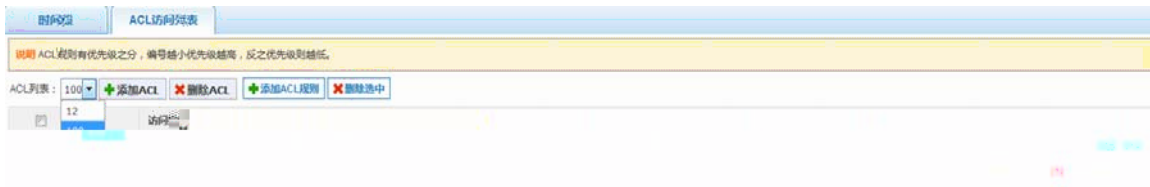

8: C

8: C

8: C

8: C

(\$ -



8: C

8: <


8: C

8: C

8: C

8: C

(\$.

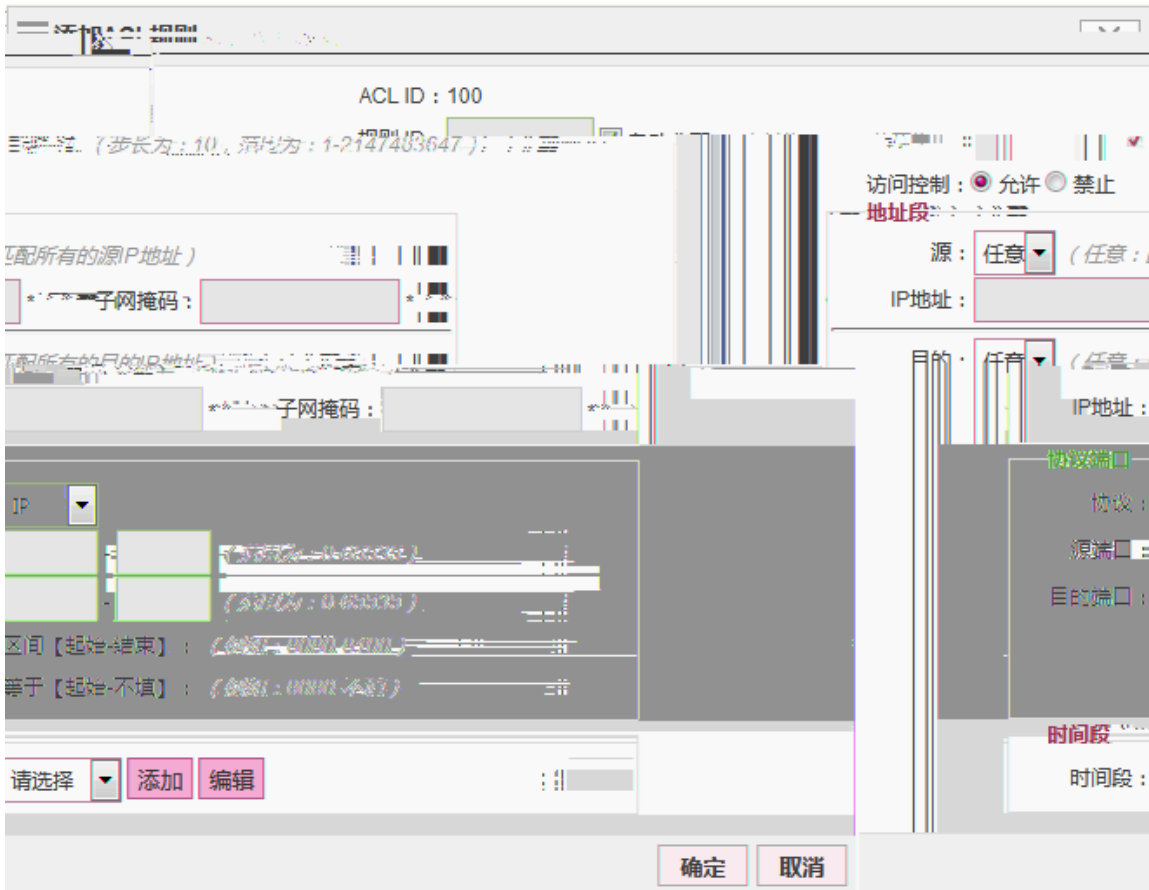

8: <

(\$) (+ . + / * - + .



1.3.9

(% % %

@ D G = f f [L ; G = f f [

添加用户限速

用户名: (可输入数字、字母、下划线、横线和中文)

带宽(1-500): Mbps * 上行带宽(1-500): Mbps * 下行带宽:

子网掩码

<input type="text"/>	*	<input type="checkbox"/>
<input type="text"/>	*	<input type="checkbox"/>
<input type="text"/>	*	<input type="checkbox"/>
<input type="text"/>	*	<input type="checkbox"/>

地址段

用户IP或网段	
<input type="text"/>	*
<input type="text"/>	*
<input type="text"/>	*
<input type="text"/>	*

时间段

时间段名称:

时间段: |

星期: 星期一 | 星期二 | 星期三 | 星期四 | 星期五 | 星期六 | 星期日


N \ Y

Ⓢ

(% % %

Ⓢ

(\$ '

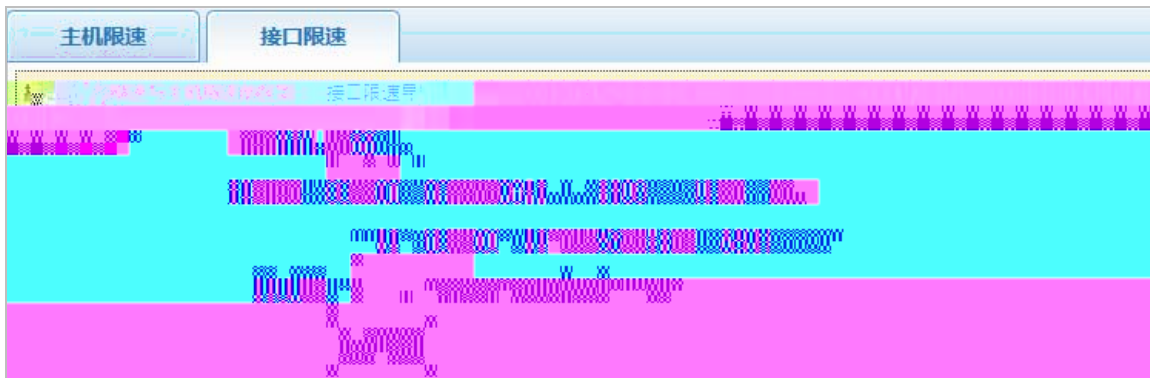

(\$ (



添加保障业务

业务名称： (可输入数字、字母、下划线、横线和中文)

带宽设置

保障带宽： Mbps * (范围为：0.5-95)

地址段

源地址： * 子网掩码： *

目的： (任意：匹配所有的目的IP地址)

IP地址： * 子网掩码： *

协议端口

协议： IP

源端口： - (范围为：0-65535)

目的端口： - (范围为：0-65535)

高级设置

IP优先级：(业务才勾选)

DSCP：EF

绝对优先保障。(建议只对语音、视频等)

N \ Y

Ⓢ Ⓢ

设备名称:

(%%' %

@kie\k

G:

注意事项：
1. 升级系统固件（*.bin）文件上传完成后，必须重启设备才能生效。

版本信息

软件版本： 10.4(3b76)in4.Release(222386) (备份bin包)
WEB版本： -1.2.3(222387) (备份web包)

级 **软件升**

文件路径： 未选择文件。
升级进度：
状态：未指定升级文件。

⚡

⚡

⚡

(%' %

)

N \Y N \Y

设备重启

提示： 重启过程需要几分钟左右的时间，请耐心等待！

(%' %


%\ok

Zf e]`^%ok

⚡ Zf e]`^%ok




(\$)

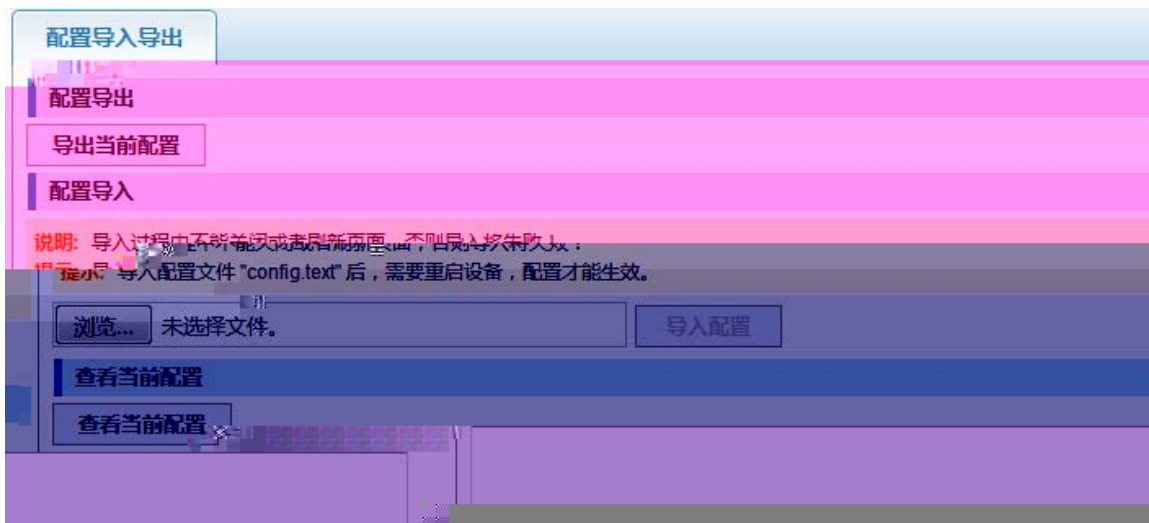

(%%' %

(\$ *

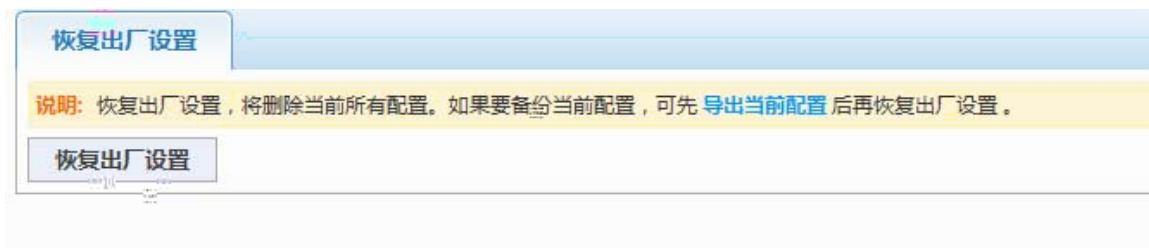

(%%' % : C@

: C@ N \Y : C@

: C@ : C@




1.3.11

Ge^

(%%(% Gieg


(\$.

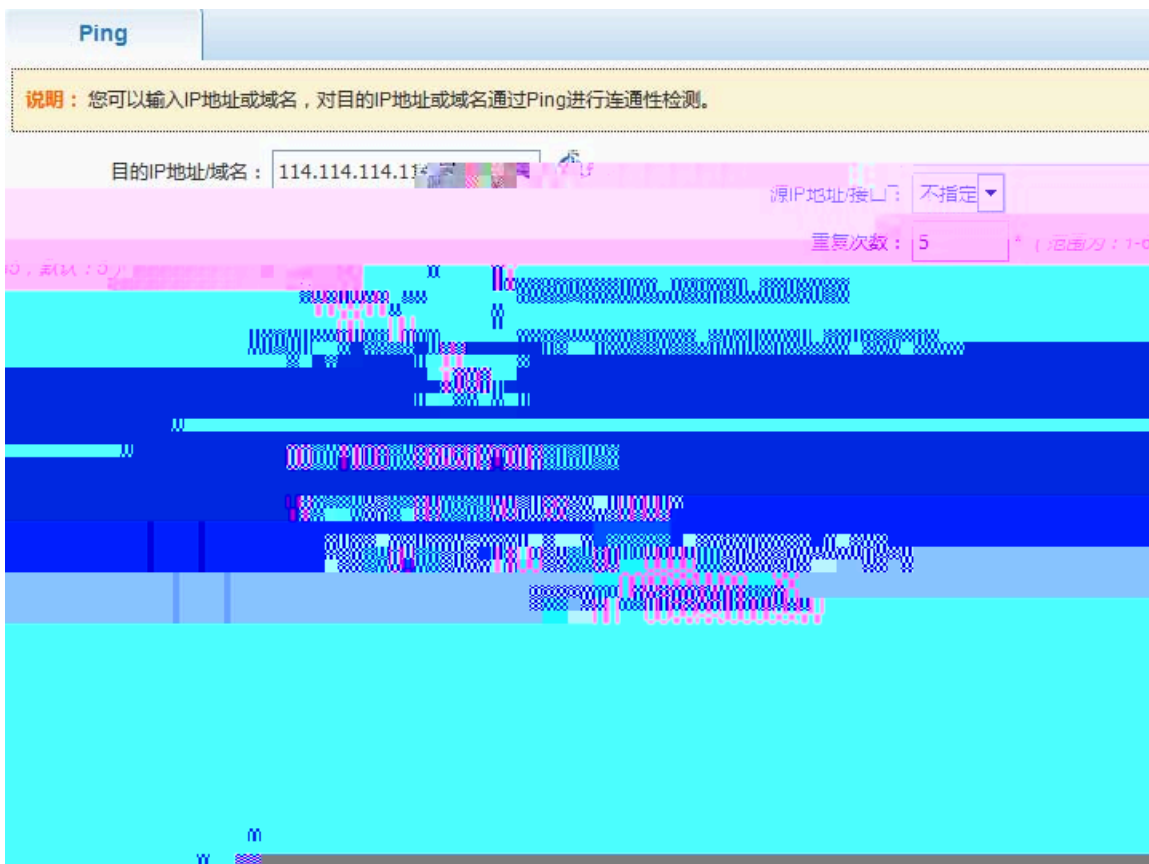

(%%(%

KIX\ifl k\

(\$ /

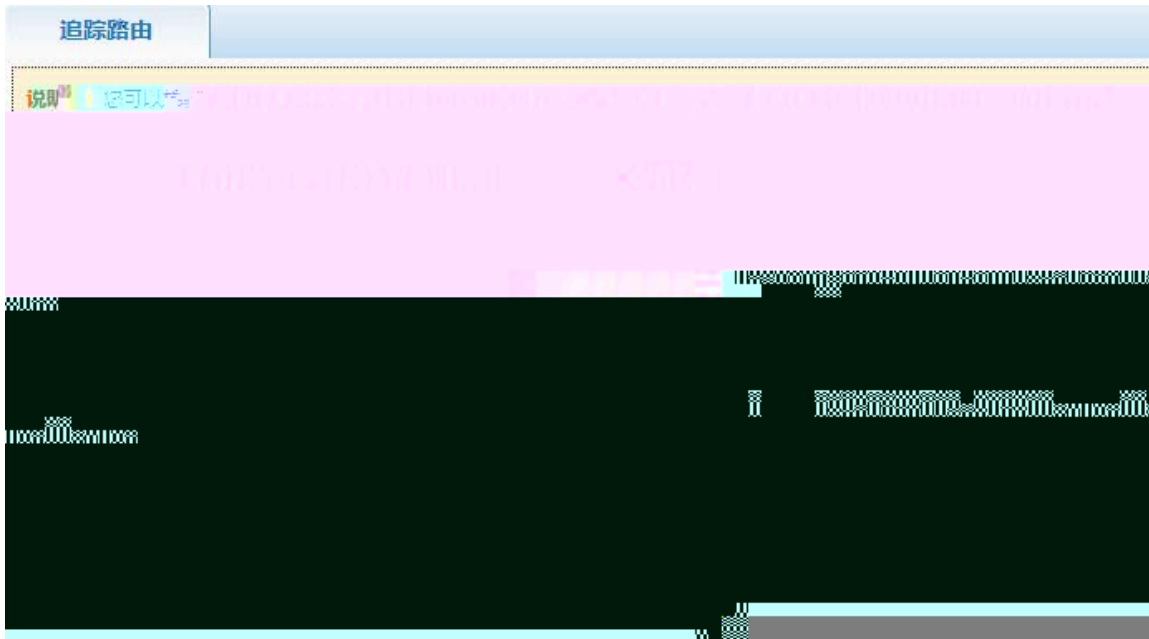

(%%(%

(\$ 0



(%)


1.4.1

N \ Y


(\$' N \ Y



(\$ (N \ Y

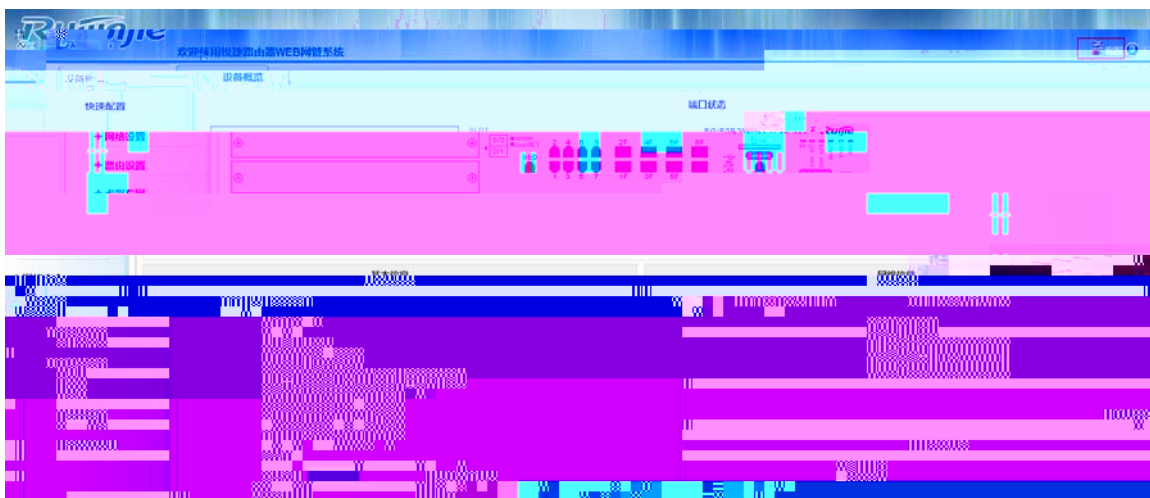

(\$)

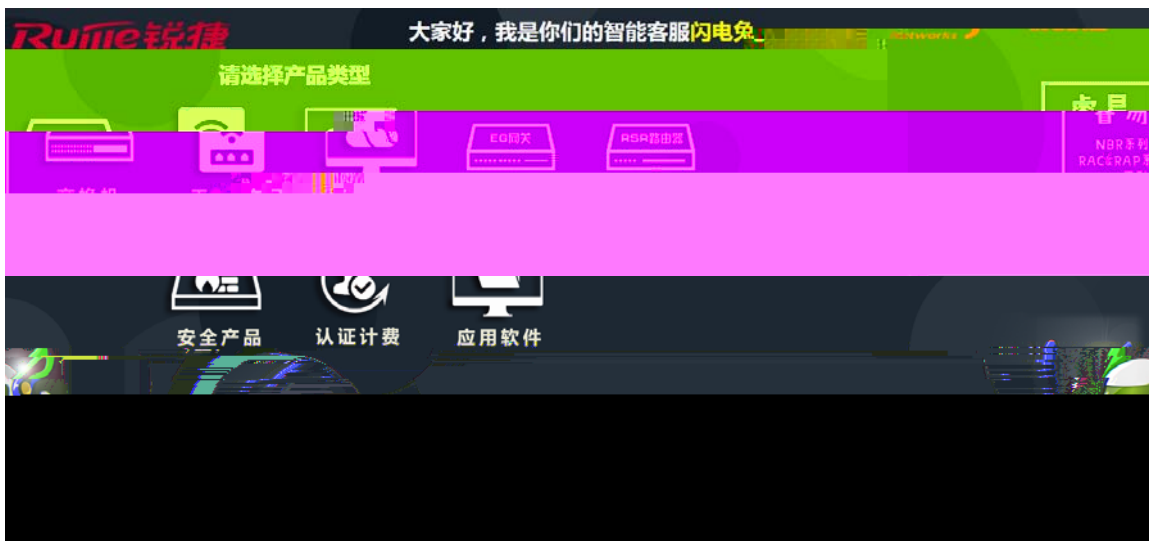

1 /r' \$/1'

+' /\$(((\$''

N \Y

N \Y

1.4.2

[_kg 1&n n n %l `a\%f d %e](#)

+' /\$(((\$'' N \Y

N \Y

(\$/*



(%

1.5.1

Web

Ctrl + 0

Ctrl + "+"

Ctrl + "-"

+" "

1.5.2

Web

IE8+ Firefox Google Chrome 8ggΔ JX]Xi` *- '

1.5.3 N eY

N \Y

N \Y

G:

(%%

1.5.4 N eY


(G: Ge^

N \Y

N \Y

(\$+ N \Y

```
Ruijie(config)#show service
ssh-server : disabled
telnet-server : enabled
```

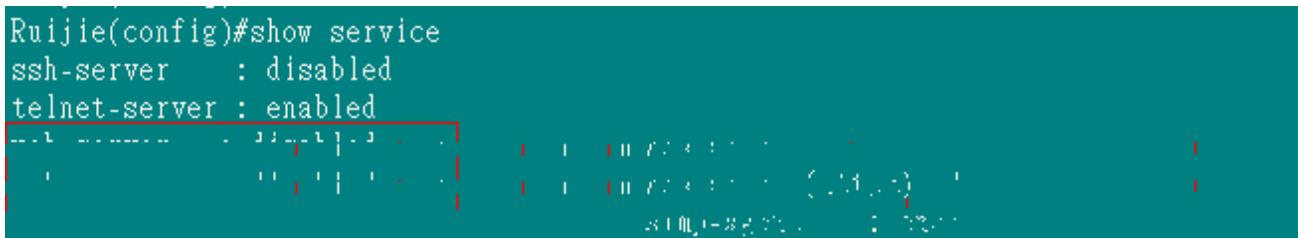

[]XYΔ[

N \Y

\eXYΔ.j\imZ\ n\Y\$ \im\i Xα

N \Y

) G: Ge^

G:

Ⓔ

* + + N \ Y N \ Y
(\$,



1.5.5 N e Y

N \ Y (' N \ Y N \ Y ('

('
